
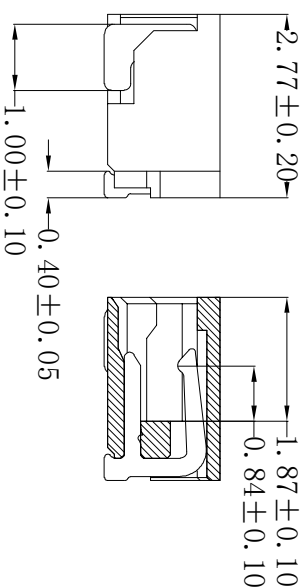


ROHS

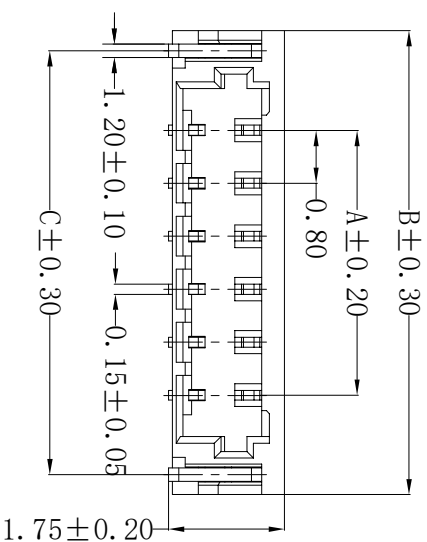

- Specification:
- Current Rating: 1A AC/DC
- Voltage Rating: 30V AC/DC
- Insulation Resistance: 100M Ω
- Withstanding Voltage: 200VAC(1Min)
- Contact resistance: 20m Ω (Max).
- Operation Temperature: -40 $^{\circ}$ C to +85 $^{\circ}$ C
- Material:
- Insulator (Housing): LCP (UL94V-0)
- Color: Black
- Material: Phosphor Bronze
- Finish: Tin Plated

Ordering Information



SCT0802WRS -xx F 1 BK 110

No. of Pins
See Table

Insulation
F=LCP V0

Package
I=Tape&Reel

Color
BK=Black

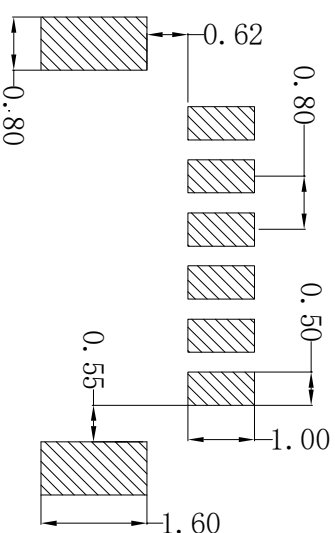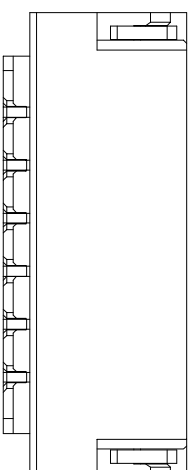

Recommended P.C.B Layout
General Tolerance ± 0.05

Dimensions			Part NO	PIN
A	B	C		
0.80	3.80	3.20	SC70802WRS-02F1BK164	2
1.60	4.60	4.00	SC70802WRS-03F1BK164	3
2.40	5.40	4.80	SC70802WRS-04F1BK164	4
3.20	6.20	5.60	SC70802WRS-05F1BK164	5
4.00	7.00	6.40	SC70802WRS-06F1BK164	6
5.60	8.60	8.00	SC70802WRS-08F1BK164	8
7.20	10.20	9.60	SC70802WRS-10F1BK164	10
8.80	11.80	11.20	SC70802WRS-12F1BK164	12
10.40	13.10	12.80	SC70802WRS-14F1BK164	14
11.20	13.90	13.60	SC70802WRS-15F1BK164	15
12.00	14.70	14.40	SC70802WRS-16F1BK164	16
12.80	15.50	15.20	SC70802WRS-17F1BK164	17
15.20	17.90	17.60	SC70802WRS-20F1BK164	20

[illegible]