


ROHS

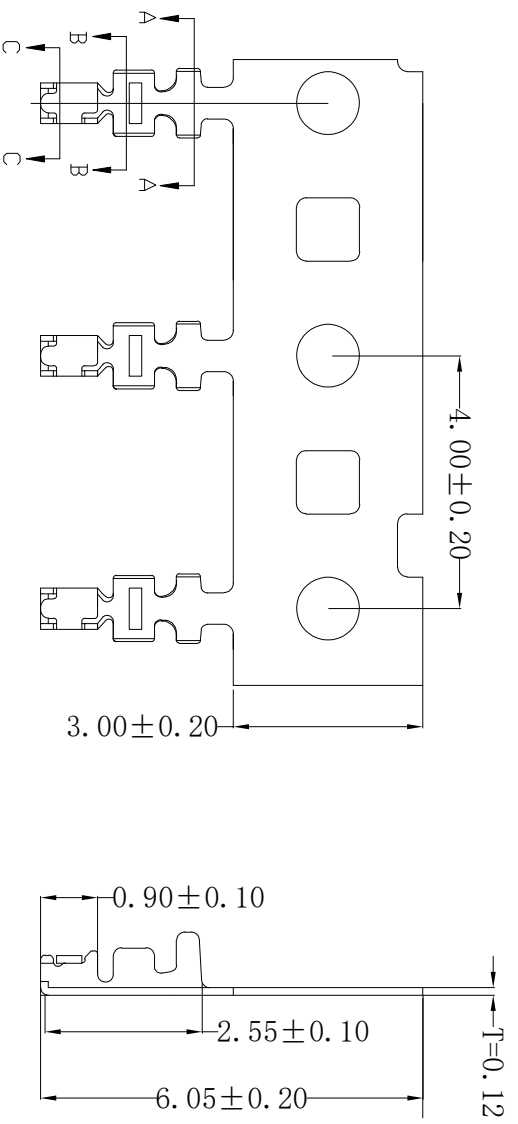


SECTION A-A

SECTION B-B

SECTION C-C

- Specification:
- Current Rating: 1A AC/DC
 - Voltage Rating: 30V AC/DC
 - Insulation Resistance: 100MΩ Min
 - Withstanding Voltage: 200VAC(1Min)
 - Contact resistance: 20mΩ(Max).
 - Operation Temperature: -40°C to +85°C
- Material:
- Applicable Wire: AWG#28-#32
 - Material: Phosphor Bronze T=0.12mm
 - Finish: Tin Plated



Ordering Information

SCT0802T P S 164

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.06.06	SCALE	<p>SCONDAR ELECTRONIC LIMITED</p>
A0	2016.06.06	NEW	---	---	X.X ±0.30	DESIGN			UNIT	
					X.XX ±0.20	CHECK	Lisa	2016.06.06	SIZE	
					X.XXX ±0.10				SHEET	Part No
					Angle ±3°	APPROVE			PROJ.	SCT0802TSPS164
					DIM TOL					0.50mm Pitch for SCT0802T Crimp Terminal Phosphor Bronze Tin/Spa Plating 28-32AWG Reel Wtg=20MPCS