





RoHS

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 50V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PBT+15% Glass Fiber
- Color: White

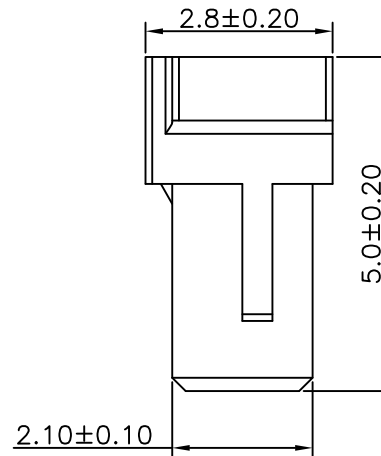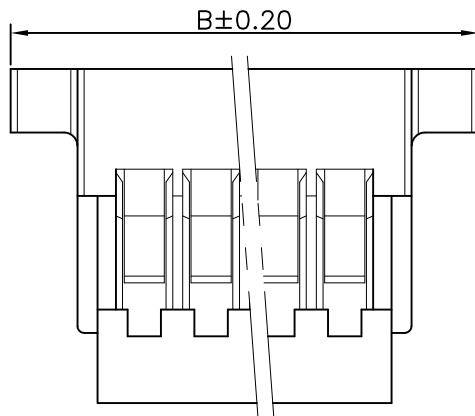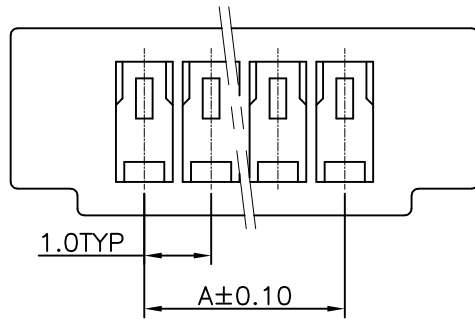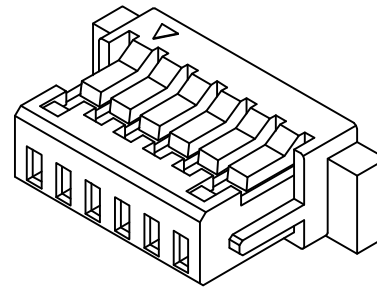




Ordering Information

SCT1001H- ** D WT 104

No. of Pins See Table
Insulation D=PBT
Color WT=White

11	10.0	14.0			
10	9.00	13.0	20	19.0	23.0
9	8.00	12.0	19	18.0	22.0
8	7.00	11.0	18	17.0	21.0
7	6.00	10.0	17	16.0	20.0
6	5.00	9.00	16	15.0	19.0
5	4.00	8.00	15	14.0	18.0
4	3.00	7.00	14	13.0	17.0
3	2.00	6.00	13	12.0	16.0
2	1.00	5.00	12	11.0	15.0
Poles	A		B		Poles
	Dimensions		Dimensions		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED
A1	2021.07.02	Changed from SCT1001H-xxP to SCT1001H-xxDWT104			X.X	±0.35			UNIT	mm	
AO	2006.05.02	NEW			X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15			SHEET	1/1	
					Angle	± 3'			PART NO.	SCT1001H-xxDWT104	
					DIM	TOL	APPROVE	Allen	2021.07.02	PROJ.	 TITLE: SH 1.0mm Housing