


RoHS

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 50V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:



- Insulator (Housing): PBT+15% Glass Fiber
- Color: White

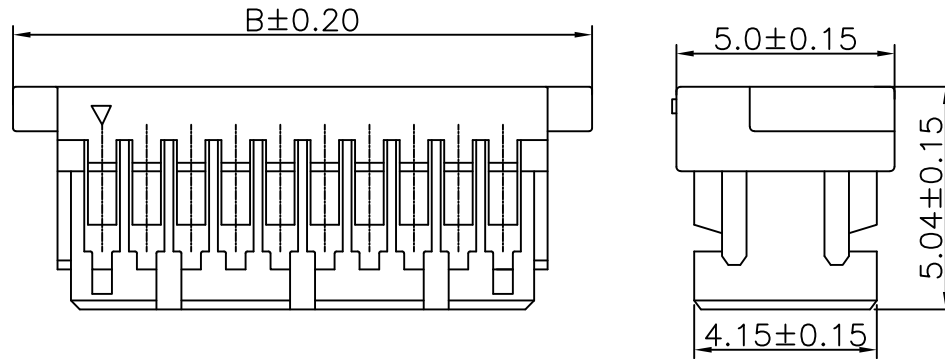

Ordering Information

SCT1002H-2x ** D WT 104

No. of Pins See Table
Insulation D=PBT
Color WT=White

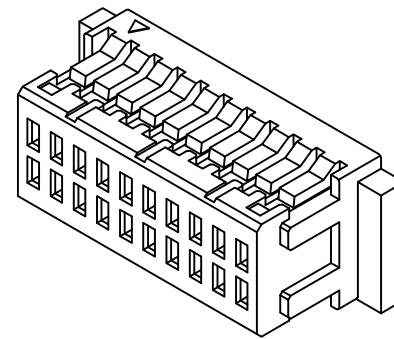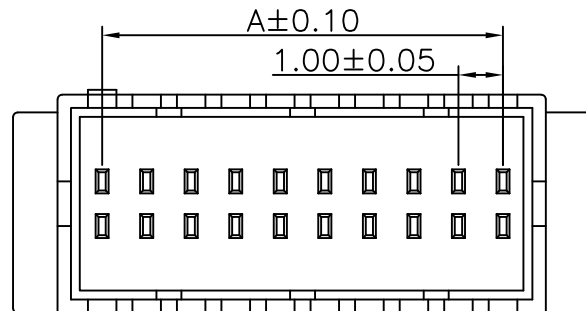

| | | |
|-------|------------|-------|
| 2x25 | 24.00 | 28.00 |
| 2x20 | 19.00 | 23.00 |
| 2x15 | 14.00 | 18.00 |
| 2x10 | 9.00 | 13.00 |
| 2x08 | 7.00 | 11.00 |
| 2x06 | 5.00 | 9.00 |
| Poles | A | B |
| | Dimensions | |

| | | | | | | | | | | | | |
|-----|------------|--|--|--------|-----------|-------|------|------------|-------|------------|--------------------------------|---------------------|
| | | | | | OPERATION | DRAW | Peng | 2021.07.10 | SCALE | - | SCONDAR ELECTRONIC LIMITED | |
| | | | | | X.X | ±0.35 | | | UNIT | mm | | |
| A1 | 2021.07.10 | Changed from SCT1002H-2XXP to SCT1002H-2XXDWT104 | | | X.XX | ±0.25 | | | SIZE | A4 | | |
| AO | 2006.05.02 | NEW | | | X.XXX | ±0.15 | Lisa | 2021.07.10 | SHEET | 1/1 | | |
| REV | DATE | MODIFICATION DESCRIPTION | | CHANGE | APPROVE | Angle | ± 3' | APPROVE | Allen | 2021.07.10 | PART NO. | SCT1002H-2xXXDWT104 |
| | | | | | DIM | TOL | | PROJ. | ⌀ | TITLE: | SH 1.0mm Housing | |