

RoHS

Recommended P.C.B Layout
General Tolerance±0.05

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 50V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40°C to +85°C

Material:

- Insulator (Housing): PA9T (UL94V-0)
- Contacts: Phos. Bronze, Gold Plated
- Color: Beige

Ordering Information









SCT1002WVSF - 2x ** E 1 BE 101

No. of Pins See Table Insulation E=PA9T Package 1=Tape&Reel Color BE=Beige

东莞市晟凯达电子科技有限公司
工程专用章

受控

2x25	24.00	25.50	27.30
2x20	19.00	20.50	22.30
2x15	14.00	15.50	17.30
2x10	9.00	10.50	12.30
2x08	7.00	8.50	10.30
2x06	5.00	6.50	8.30
Poles	A	B	C
	Dimensions		

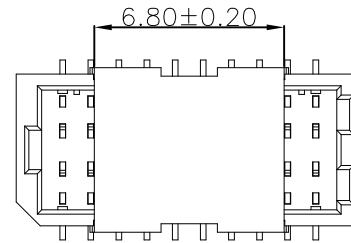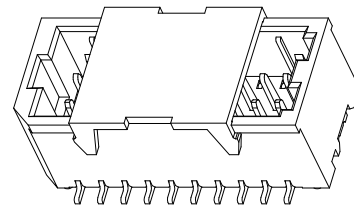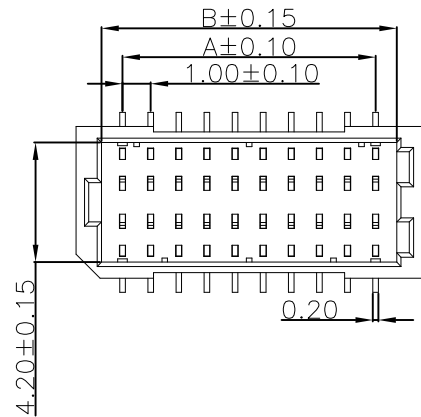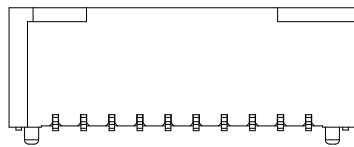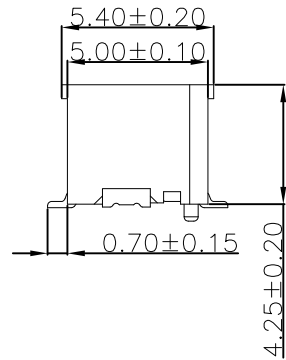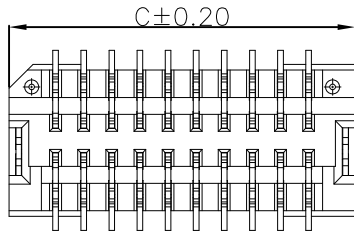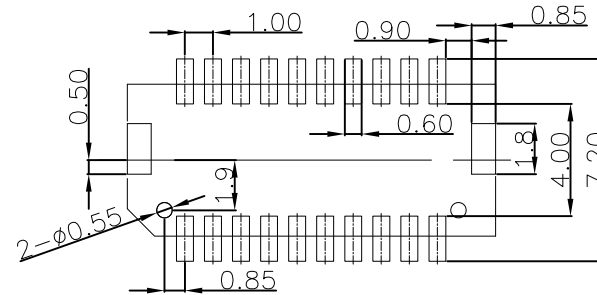

					OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
A1	2021.07.10	Changed from SCT1002WV-S-F-2XXP to SCT1002WVSF-2XXE1BE101			X.XX ±0.25	CHECK	Lisa	2021.07.10	SIZE	A4		
AO	2006.05.02	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.10	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3'				PROJ.	⊕	PART NO.	SCT1002WVSF-2XXE1BE101
					DIM TOL				TITLE:			SHD 1.00mm Pitch 180° SMT Wafer Connector