

RoHS

Specifications:

Electrical

Rated Voltage:100V AC,DC

Rated Current: 1A

Withstand Voltage: 500V AC/minute

Contact Resistance: 40mΩ (MAX.)

Insulation Resistance: 100MΩ (MIN.)

Temperature Range: -40°C~ +80°C

Material and Finish:


Circuits:30

Material:NYLON 46 UL 94V-0

Metal Shell:C5191 Tin plated over nickel

Use with:A1002T

Mates with:A1002W

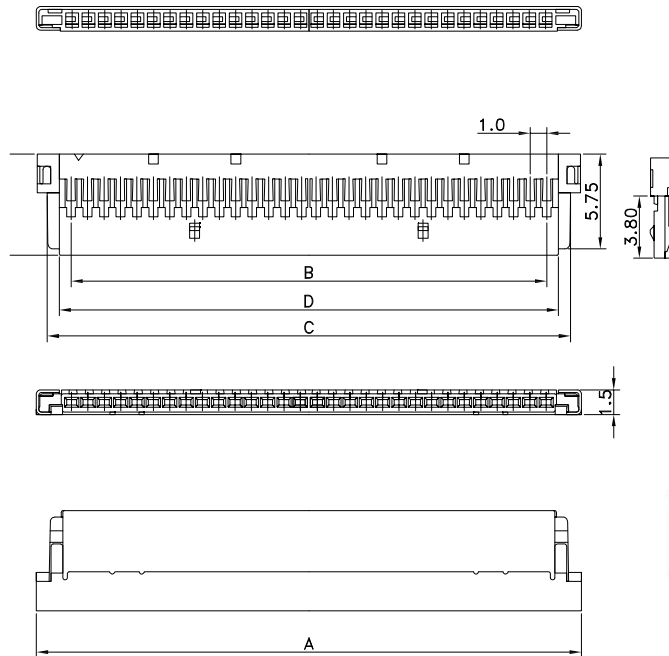

东莞市晟凯达电子科技有限公司
工程专用章

受控

Dimensional & Ordering Information:

| Cir- cuits | Dimension mm | | | |
|---------------|--------------|-------|-------|-------|
| | A | B | C | D |
| 14 | 17.50 | 13.00 | 15.90 | 14.44 |
| 20 | 23.50 | 19.00 | 21.90 | 20.44 |
| 30 | 33.50 | 29.00 | 31.90 | 30.44 |

| | | | | | | | | | | | | | |
|-----|------------|--------------------------|--|--------|---------|-------------|---------|------|------------|-------|-----|--------------------------------|------------------------------|
| | | | | | | OPERATION | DRAW | Yang | 2020.03.03 | SCALE | - | SCONDAR ELECTRONIC LIMITED | |
| | | | | | | X.X ±0.35 | DESIGN | | | UNIT | mm | | |
| | | | | | | X.XX ±0.25 | CHECK | Lisa | 2020.03.03 | SIZE | A4 | | |
| AO | 2020.03.03 | | | | | X.XXX ±0.15 | APPROVE | | | SHEET | 1/1 | | PART NO. |
| REV | DATE | MODIFICATION DESCRIPTION | | CHANGE | APPROVE | Angle ± 3° | | | | PROJ. | ◆ | TITLE: | DF-19 PA46 Beige xxP housing |
| | | | | | | DIM TOL | | | | | | | |