


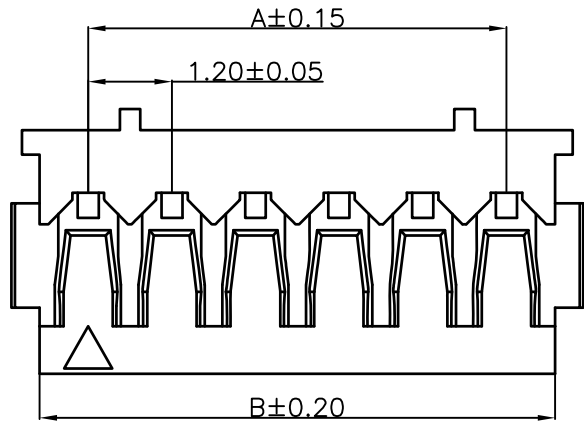


RoHS



Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 50V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: White

**Ordering Information**




SCT1200H - xx B WT 107

No. of Pins  
See Table

Insulation  
B=PA66

Color  
WT=White

11	12.00	13.40			
10	10.80	12.20			
9	9.60	11.00			
8	8.40	9.80			
7	7.20	8.60			
6	6.00	7.40			
5	4.80	6.20	15	16.80	18.20
4	3.60	5.00	14	15.60	17.00
3	2.40	3.80	13	14.40	15.80
2	1.20	2.60	12	13.20	14.60
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.05	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.05	Changed from SCT1200H-xxP to SCT1200H-xxBWT107			X.X	±0.35			UNIT	mm		
AO	2006.05.02	NEW			X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15		2021.07.05	SHEET	1/1		
					Angle	± 3'			PROJ.		PART NO.	SCT1200H-xxBWT107 
					DIM	TOL	APPROVE	Allen	2021.07.05	TITLE:	ACH1.20mm Pitch Housing Connector	