

RoHS

Recommended P.C.B Layout
General Tolerance±0.05

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 50V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40°C to +85°C

Material:

- Insulator (Housing): PA9T (UL94V-0)
- Contacts:Brass,Tin Plated
- Color: Beige

Ordering Information

SCT1200WRS - ** E 1 BE 107


No.of Pins
See Table

Insulation
E=PA9T

Package
1=Tape&Reel

Color
BE=Beige

10	10.80	12.30	13.80	12.80					
9	9.60	11.10	12.60	11.60					
8	8.40	9.90	11.40	10.40					
7	7.20	8.70	10.20	9.20					
6	6.00	7.50	9.00	8.00	15	16.80	18.30	19.80	18.80
5	4.80	6.30	7.80	6.80	14	15.60	17.10	18.60	17.60
4	3.60	5.10	5.60	5.60	13	14.40	15.90	17.40	16.40
3	2.40	3.90	5.40	4.40	12	13.20	14.70	16.20	15.20
2	1.20	2.70	4.20	3.20	11	12.00	13.50	15.00	14.00
Poles	A	B	C	D	Poles	A	B	C	D
	Dimensions(mm)					Dimensions(mm)			

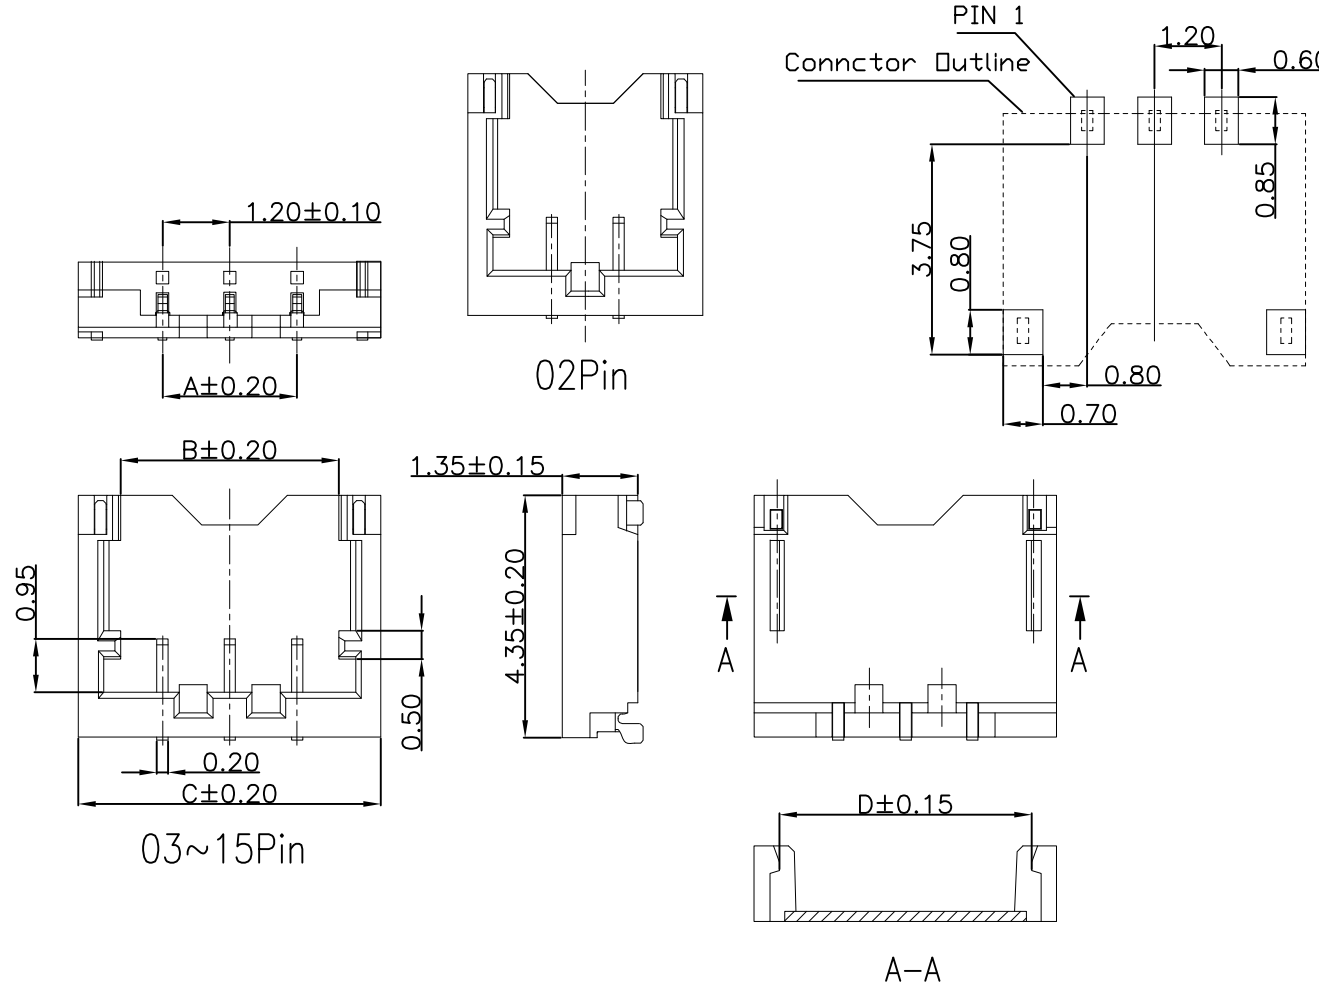

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.05	SCALE	UNIT	mm	SCONDAR ELECTRONIC LIMITED
A1	2021.07.05	Changed from SCT1200WR-S-xxP to SCT1200WRS-xxE1BE107			X.X	±0.35						
AO	2006.05.02	NEW			X.XX	±0.25	Lisa	2021.07.05		A4		TITLE: ACH1.20mm 90° SMT Wafer
					X.XXX	±0.15	Allen	2021.07.05		1/1		
					Angle	± 3'						
					DIM	TOL						

SCONDAR ELECTRONIC LIMITED

ACH1.20mm 90° SMT Wafer