
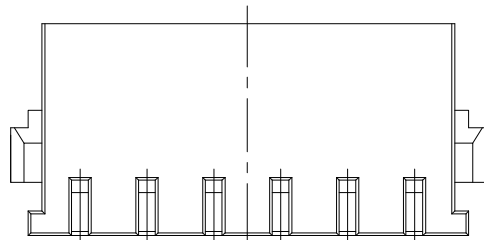



RoHS

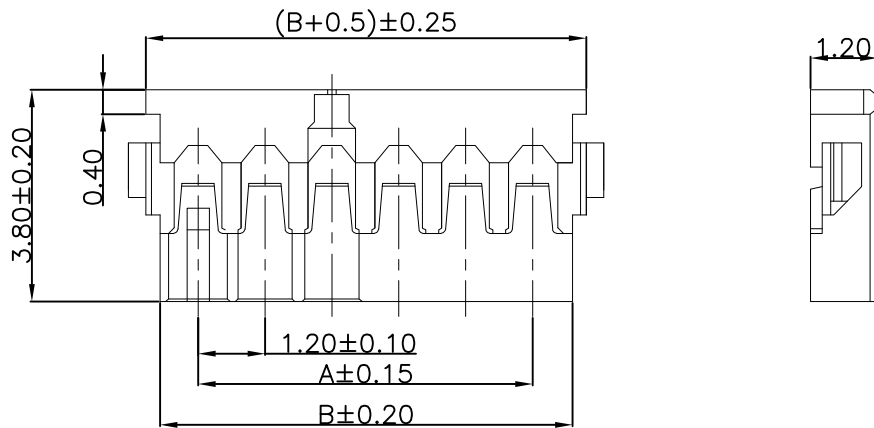

Specification:

- Current Rating: 1.5A AC/DC
- Voltage Rating: 50V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PA10T (UL94V-0)
- Color: White

Ordering Information

SCT1202H - xx J BK 107

No.of Pins
See Table

Insulation
J=PA10T

Color
BK=Black

11	12.00	13.40			
10	10.80	12.20			
9	9.60	11.00			
8	8.40	9.80			
7	7.20	8.60			
6	6.00	7.40			
5	4.80	6.20	15	16.80	18.20
4	3.60	5.00	14	15.60	17.00
3	2.40	3.80	13	14.40	15.80
2	1.20	2.60	12	13.20	14.60
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.05	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.05	Changed from SCT1202H-xxP to SCT1202H-xxJBK107			X.X	±0.35			UNIT	mm		
AO	2006.05.02	NEW			X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15		2021.07.05	SHEET	1/1		PART NO.
					Angle	± 3'			PROJ.	☉	TITLE:	MX 1.20mm Pitch Housing Connector
					DIM	TOL	APPROVE	Allen	2021.07.05			