


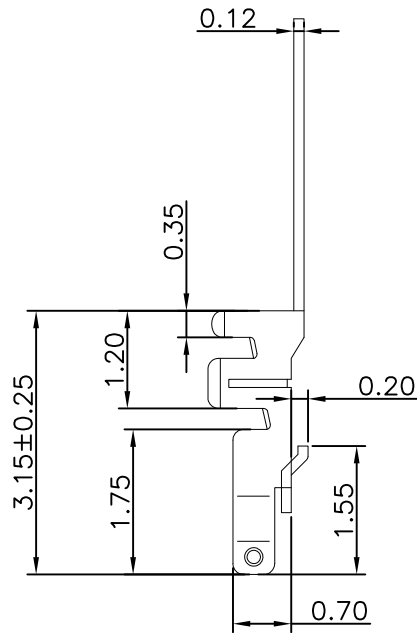




RoHS

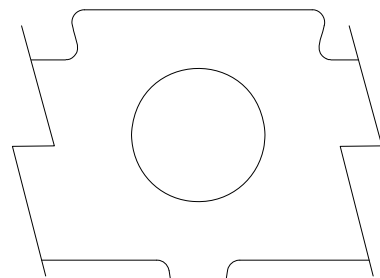

A-A



B-B



C-C

Specification:

- Current Rating: 1.5A AC/DC
- Voltage Rating: 50V AC/DC
- Insulation Resistance: 100MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 500VAC(Min)
- Operation Temperature: -25°C to +85°C


Material:

- Applicable Wires: 28AWG~32AWG
- Material: Phosphor Bronze, T=0.12mm
- Finish: Tin Plated/Gold Plated

Ordering Information

SCT1202 T P * 107

Material:
P=Phosphor Bronze
S=Phosphor Bronze
Contact Plated
S=Tin Plated
G=Gold Plated

					OPERATION	DRAW	Peng	2021.07.05	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25		CHECK	Lisa	2021.07.05	SIZE		A4
					X.XXX ±0.15	APPROVE	Allen	2021.07.05	SHEET	1/1		PART NO.
A1	2021.07.05	Changed from SCT1202-TG to SCT1202TPx107			Angle				PROJ.	⌀	TITLE:	MX 1.2mm Terminal
AO	2009.03.03	NEW			DIM							
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE							