







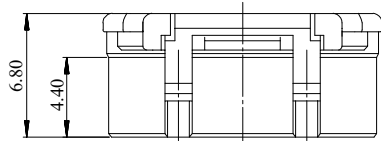
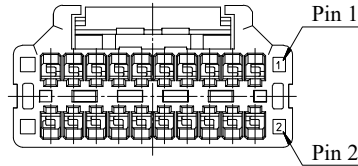



RoHS

Contact resistance(接触电阻): $\leq 30m\Omega$
 After environmental testing(环境测试后): $\leq 40m\Omega$
 The material :PT-PBT UL94V-0
 color:white

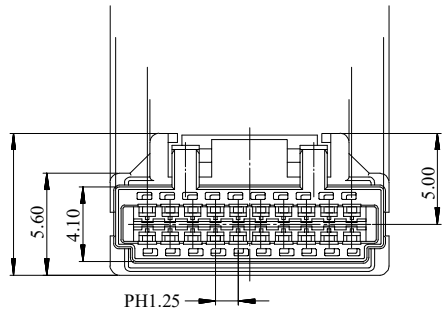

20Pin

30Pin

40Pin

1220H-2*XX-PT	PBT UL94V-0 Halogen-Free	1220T	1220W	1,000Pcs
1220H-2*XX-PT	PBT UL 94V-0			
PART NO	Material	Suitable YZDZ Terminal	Mates With YZDZ Wafer	Q' ty/Bag

Poles	Dimensions (mm)			
	A	B	C	D
20	15.35	14.75	11.25	10.95
30	21.60	21.00	17.50	17.20
40	27.85	27.25	23.75	23.45

东莞市晟凯达电子科技有限公司
 工程专用章

受控

					OPERATION	DRAW	Yang	2022.06.22	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	± 0.35			UNIT	mm		
					X.XX	± 0.25			SIZE	A4		
A0	2006.05.02	NEW			X.XXX	± 0.15	Lisa	2022.06.22	SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	$\pm 3'$ TOL	APPROVE		PROJ.		TITLE:	MX 1.20mm Pitch Housing Connector