



RoHS

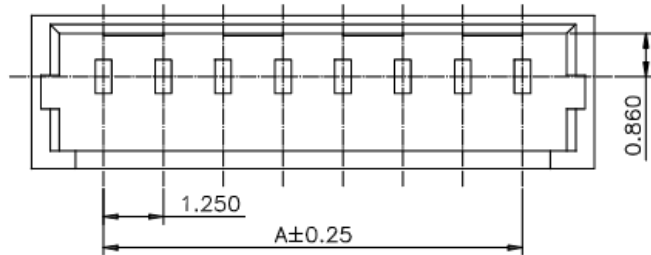

东莞市晟凯达电子科技有限公司
工程专用章

受控

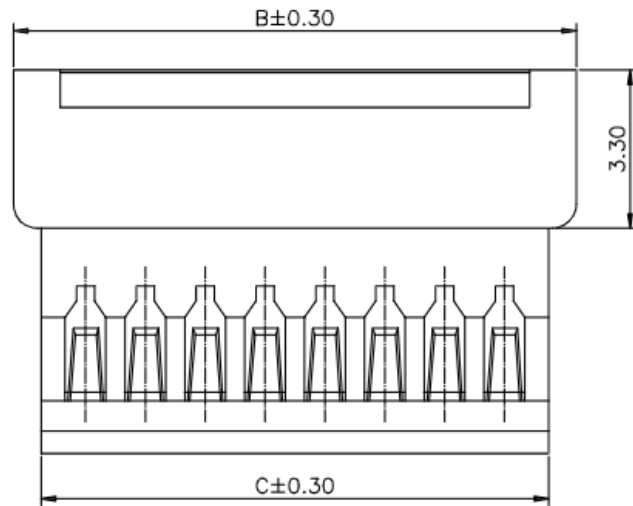

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 125V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 250VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40°C to +105°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0) White
PBT (UL94V-0) Black
- Color: White

Ordering Information

SCT1251FH - ** * ** 113

No. of Pins
See Table
Insulation
B=PA66
D=PBT
Color
WT=White
BK=Black

11	12.50	15.65	14.35				
10	11.25	14.40	13.10				
9	10.00	13.15	11.85				
8	8.75	11.90	10.60				
7	7.50	10.65	9.35				
6	6.25	9.60	8.10	16	18.75	21.90	20.60
5	5.00	8.15	6.85	15	17.50	20.65	19.35
4	3.75	6.90	5.60	14	16.25	19.40	18.10
3	2.50	5.65	4.35	13	15.00	18.15	16.85
2	1.25	4.40	3.10	12	13.75	16.90	15.60
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

					OPERATION	DRAW	Peng	2006.05.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X	±0.35			UNIT	mm	
					X.XX	±0.25			SIZE	A4	
A0	2006.05.02	NEW			X.XXX	±0.15	CHECK	Lisa	2006.05.02	SHEET	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	APPROVE	Allen	2006.05.02	PROJ.	◆
					Angle	± 3'				PART NO.	SCT1251FH-xxxxx113
					DIM	TOL				TITLE:	MX1.25mm Pitch Female Housing Connector