

RoHS

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: 500MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 30mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: Gray


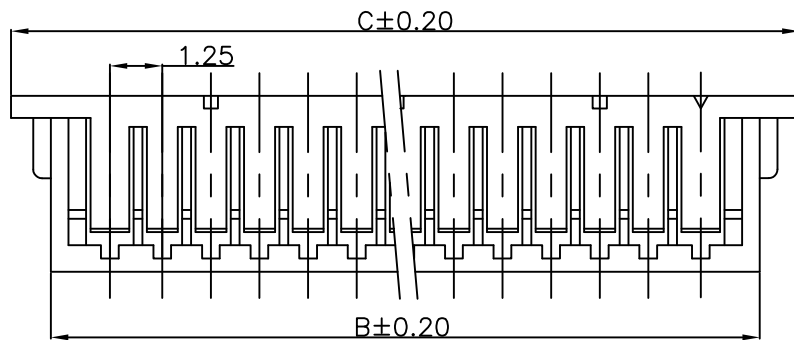
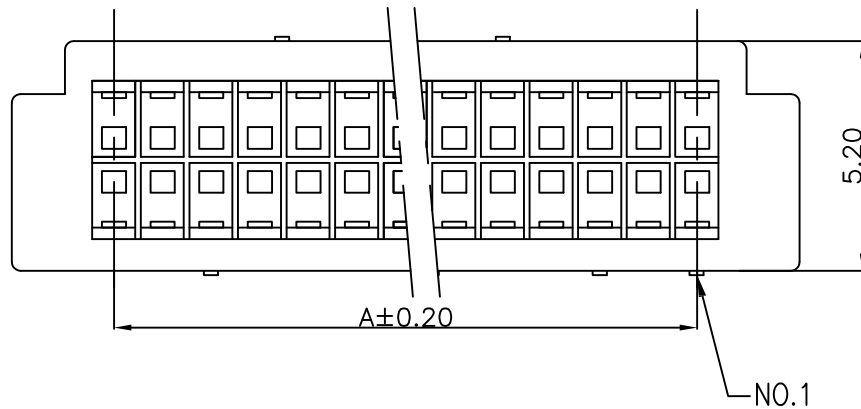
Ordering Information

SCT1252H - 2xx B GR 104




No.of Pins
See Table

Insulation
B=PA66

Color
GR=Gray



2*20	23.75	26.75	29.25
2*15	17.50	20.550	23.00
2*10	11.25	14.25	16.75
2*05	5.00	8.00	10.50
Poles	A	B	C
	Dimensions		

					OPERATION	DRAW	Peng	2021.07.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
					X.X ±0.35	DESIGN			UNIT	mm			
A1	2021.07.02	Changed from SSCT1252H-2xxP to SCT1252H-2xxBGR104			X.XX ±0.25		CHECK	Lisa	2021.07.02	SIZE		A4	
AO	2006.05.02	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.02	SHEET	1/1		PART NO.	SCT1252H-2xxBGR104 
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 3' TOL	APPROVE	Allen	2021.07.02	PROJ.		TITLE:	DF13 1.25mm Pitch Housing Connector