

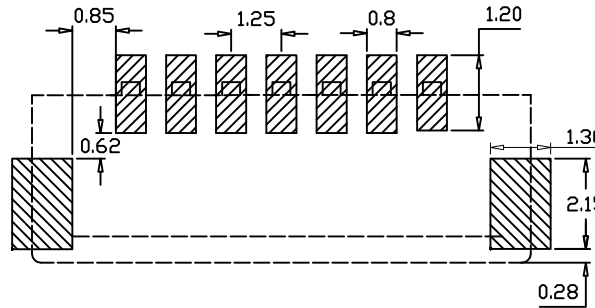
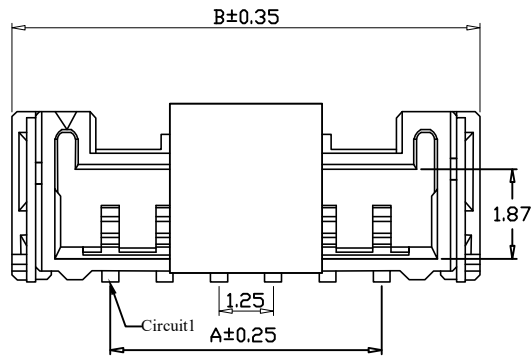


RoHS



Recommended P.C.B Layout  
General tolerance±0.05

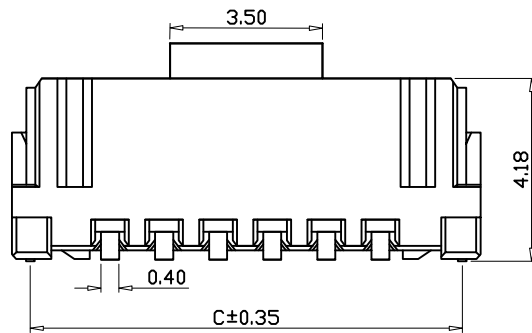

- Specification:
- Current Rating: 1.5A AC/DC
  - Voltage Rating: 50V AC/DC
  - Insulation Resistance: 100MΩ (Min)
  - Withstanding Voltage: 500VAC (1Min)
  - Contact resistance: 20MΩ MAX.
  - Operation Temperature: -25°C to +105°C

- Material:
- Housing: LCP UL94V-0
  - Color: Black
  - PIN: Brass/Tin-plated, Gold-Plated
  - Wafer Fixed Food: Bass/Tin-plated

### Ordering Information

SCT1256WVS-XX F 1 BK 164

No. of Pins See Table  
Insulation F=LCP  
Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray  
Color BK=Black

Dimensions				PIN	Dimensions			PIN
A	B	C	A		B	C		
1.25	5.75	4.90	2	11.25	15.75	14.90	10	
2.50	7.00	6.15	3	12.50	17.00	16.15	11	
3.75	8.25	7.40	4	13.75	18.25	17.40	12	
5.00	9.50	8.65	5	15.00	19.50	18.65	13	
6.25	10.75	9.90	6	16.25	20.75	19.90	14	
7.50	12.00	11.15	7	17.50	22.00	21.15	15	
8.75	13.25	12.40	8	18.75	23.25	22.40	16	
10.00	14.50	13.65	9					

SCONDAR ELECTRONIC LIMITED  
ENGINEER YAO APPROVED

OPERATION	DRAW	YAO	2023.9.13
X.X ±0.35	DESIGN	Lisa	2023.9.13
X.XX ±0.25			
X.XXX ±0.15	CHECK		
Angle ± 3'	APPROVE		
DIM TOL			

SCALE: -  
UNIT: mm  
SIZE: A4  
SHEET: 1/1  
PROJ. TITLE: 1.25mm LCP Black xxP Single SMT WV Tape&Reel

**SCONDAR**  
SCONDAR ELECTRONIC LIMITED

PART NO. SCT1256WVS-xxF1BK164

AO	2016.03.03	NEW		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE