

RoHS

Recommended P.C.B Layout
General Tolerance ± 0.05

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 200V AC/DC
- Insulation Resistance: 100M Ω Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20m Ω (Max).
- Operation Temperature: -40 $^{\circ}$ C to +85 $^{\circ}$ C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Contacts: Brass
- Solder Tabs: Tin Plated
- Color: Beige

Ordering Information

SCT1257WV - ** B 1 BE 602






No.of Pins
See Table

Insulation
B=PA66

Package
1=Tape&Reel

Color
BE=Beige

10	11.25	14.25			
9	10.00	13.00			
8	8.75	11.75			
7	7.50	10.50			
6	6.25	9.25	15	17.50	20.50
5	5.00	8.00	14	16.25	19.25
4	3.75	6.75	13	15.00	18.0
3	2.50	5.50	12	13.75	16.75
2	1.25	4.25	11	12.50	15.50
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

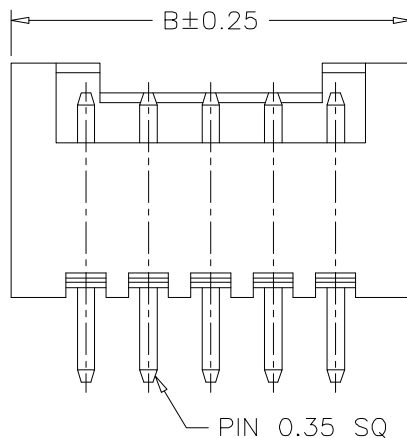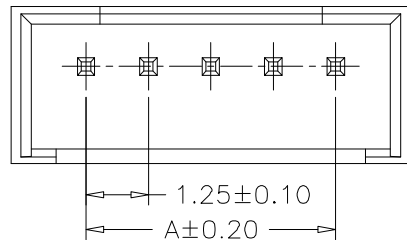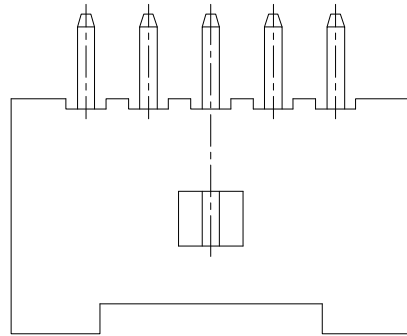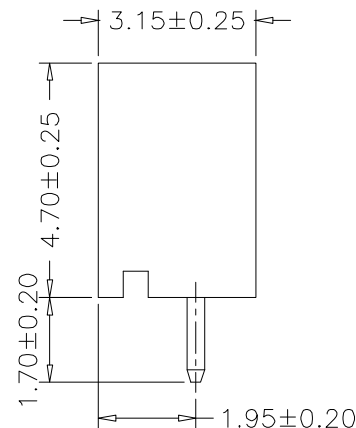

					OPERATION		DRAW	Peng	2021.07.03	SCALE		 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35	DESIGN			UNIT	mm		
A0	2021.07.03	Changed from SCT1257WV-xxP to SCT1257WV-xxB1BE1602		_____	X.XX	±0.25				SIZE	A4		
					X.XXX	±0.15	CHECK	Lisa	2021.07.03				
A0	2010.08.02	NEW		_____			APPROVE	Allen	2021.07.03	SHEET	1/1	PART NO.	SCT1257WV-xxB1BE1602 
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle DIM TOL					PROJ.		TITLE: