

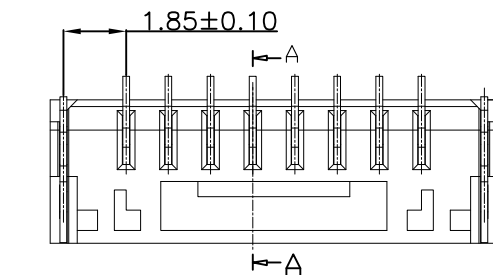

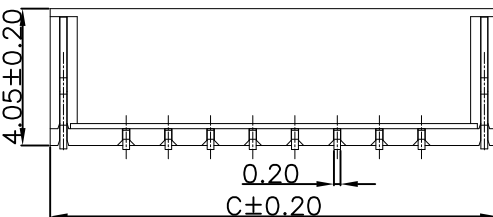


RoHS

**Recommended P.C.B Layout**  
General Tolerance±0.05

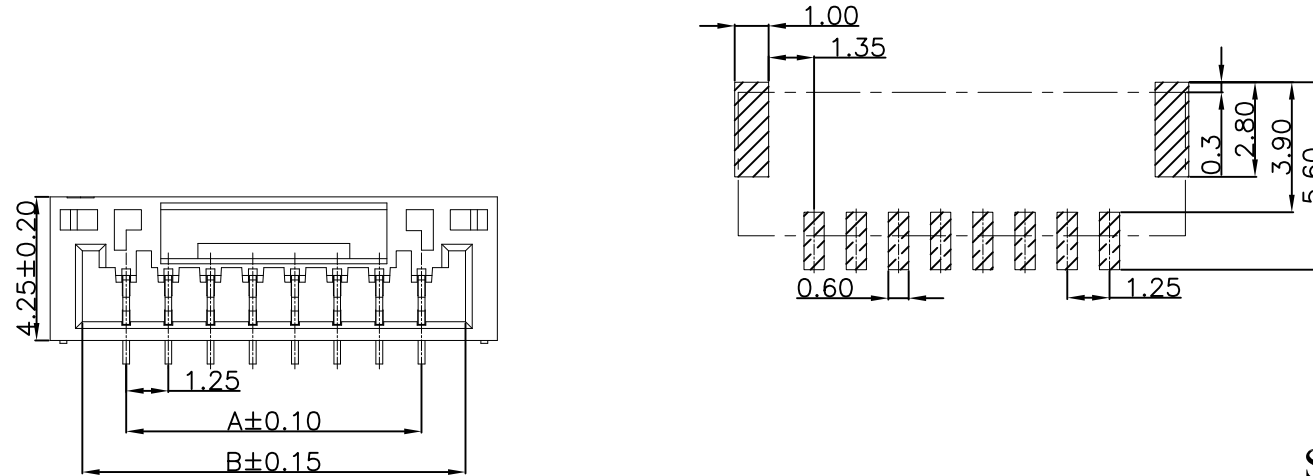

**Specification:**

- Current Rating: 1A AC/DC
- Voltage Rating: 150V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40°C to +85°C

**Material:**

- Insulator (Housing): Nylon 9T (UL94V-0)
- Contacts: Phosphor.Bronze
- Solder Tabs: Tin Plated
- Color: Beige

**Ordering Information**

SCT1258WVS - \*\* E 1 BE 101

No.of Pins See Table    Insulation E=PA9T    Package 1=Tape&Reel    Color BE=Beige

10	11.25	13.85	15.75				
9	10.00	12.60	14.50				
8	8.75	11.35	13.25				
7	7.50	10.10	12.00				
6	6.25	8.85	10.75	15	17.50	20.10	22.00
5	5.00	7.60	9.50	14	16.25	18.85	20.75
4	3.75	6.35	8.25	13	15.00	17.60	19.50
3	2.50	5.10	7.00	12	13.75	16.35	18.25
2	1.25	3.85	5.75	11	12.50	15.10	17.00
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.03	SCALE	UNIT	mm	SCONDAR ELECTRONIC LIMITED
AO	2021.07.03	SCT1258WV-S-xxP changed to SCT1258WVS-xxE1BE101			X.X	±0.35						
AO	2010.08.02	NEW			X.XX	±0.25	Lisa	2021.07.03	SIZE	A4		TITLE: GH 1.25mm 180° SMT Wafer
					X.XXX	±0.15	Allen	2021.07.03	SHEET	1/1		
					Angle	± 3'			PROJ.			
					DIM	TOL						

