

RoHS




Recommended P.C.B Layout
General Tolerance±0.05

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 350V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:



- Insulator (Housing): Nylon 6T (UL94V-0)
- Contacts:Brass,Tin Plated
- Color: Beige

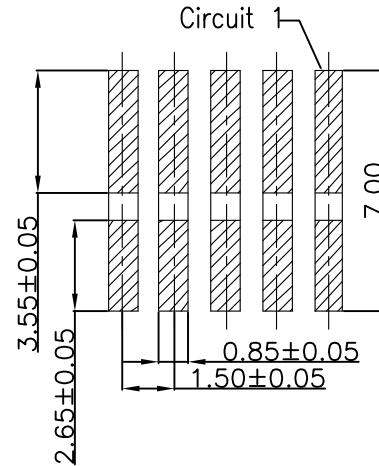

Ordering Information

SCT1500WRS - ** A * BE 107

No. of Pins See Table
Insulation A=PA6T
Package 1=Tape&Reel 2=Tube
Color BE=Beige

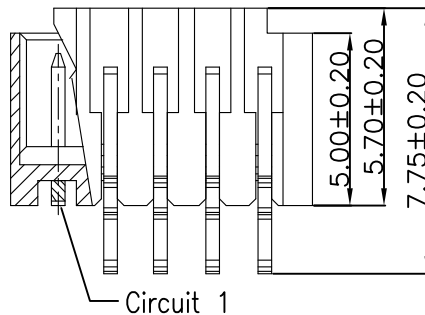

东莞市赛凯达电子科技有限公司
工程专用章

受控

11	15.00	17.80			
10	13.50	16.30			
9	12.00	14.80			
8	10.50	13.30			
7	9.00	11.80			
6	7.50	10.30			
5	6.00	8.80	15	21.00	23.80
4	4.50	7.30	14	19.50	22.30
3	3.00	5.80	13	18.00	20.80
2	1.50	4.30	12	16.50	19.30
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.06	SCALE		 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.06	Changed from SCT1500WR-S-xxP to SCT1500WRS-xxAxBE107			X.X	±0.35			UNIT	mm		
AO	2006.05.02	NEW			X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
					Angle	± 3'			PROJ.	☉	PART NO.	SCT1500WRS-xxAxBE107
					DIM	TOL					TITLE:	MX 1.50mm 90° SMT Wafer