

RoHS

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 50V AC/DC
- Insulation Resistance: 500MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: White
- Alicable Wire: 26~32AWG





**Ordering Information**

SCT1501H - xx B WT 102

No.of Pins  
See Table

Insulation  
B=PA66

Color  
WT=White

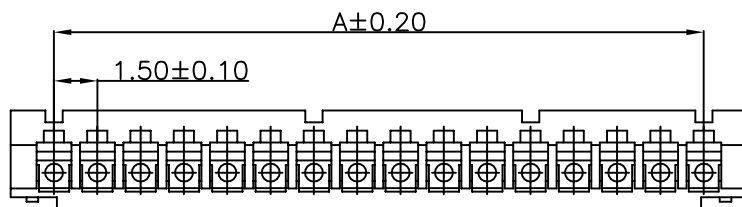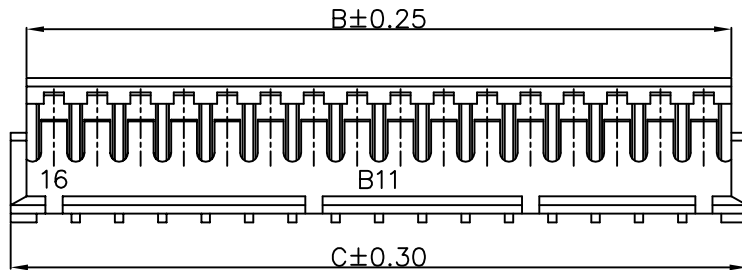

11	15.00	16.90	18.00				
10	13.50	15.40	16.50				
9	12.00	13.90	15.00				
8	10.50	12.40	13.50				
7	9.00	10.90	12.00				
6	7.50	9.40	10.50	16	22.50	24.40	25.50
5	6.00	7.90	9.00	15	21.00	22.90	24.00
4	4.50	6.40	7.50	14	19.50	21.40	22.50
3	3.00	4.90	6.00	13	18.00	19.90	21.00
2	1.50	3.40	4.50	12	16.50	18.40	19.50
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.06	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.06	Changed from SCT1501H-xxP to SCT1501H-xxBWT110			X.X	±0.35			UNIT	mm		
AO	2021.07.15	NEW			X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
					Angle	± 3'			PART NO.	SCT1501H-xxBWT102		
					DIM	TOL			PROJ.		TITLE:	ZH 1.50mm Pitch Housing Connector