


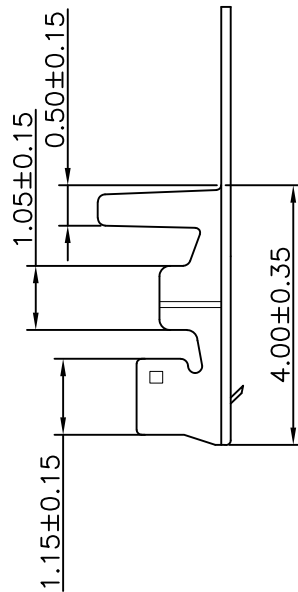



RoHS

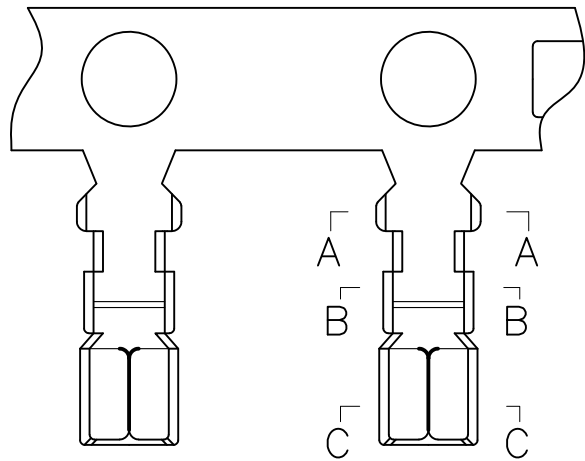

A-A



B-B



C-C

**Specification:**

- Current Rating: 1A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: 500MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 500VAC(Min)
- Operation Temperature: -25°C to +85°C




**Material:**

- Applicable Wires: 26AWG~32AWG
- Material: Phosphor Bronze, T=0.15mm
- Finish: Tin Plated/Gold Plated
- Q'TY: 15000PCS/Reel

**Ordering Information**

SCT1501 T P S 126

Material:  
P=Phosphor Bronze      S=Tin Plated

					OPERATION	DRAW	Peng	2021.07.06	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
					X.X    ±0.35	DESIGN			UNIT	mm			
					X.XX   ±0.25		CHECK	Lisa	2021.07.06	SIZE		A4	
A1	2021.07.06	Changed from SCT1501-TP to SCT1501TPS126			X.XXX   ±0.15	APPROVE	Allen	2021.07.06	SHEET	1/1	PART NO.	SCT1501TPS126	
AO	2009.03.03	NEW			Angle   ± 3'				PROJ.		TITLE:	ZH1.5mm Terminal	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL							