

RoHS

Recommended P.C.B Layout  
General Tolerance±0.05

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: 500MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C






Material:

- Insulator (Housing): Nylon 46 (UL94V-0)
- Contacts:Brass,Tin Plated
- Color: Beige
- Q'TY: 1000PCS/Bag

Ordering Information

SCT1501WR - \*\* G 0 BE 102

No.of Pins See Table      Insulation G=PA46      Package 0=PE Bag      Color BE=Beige

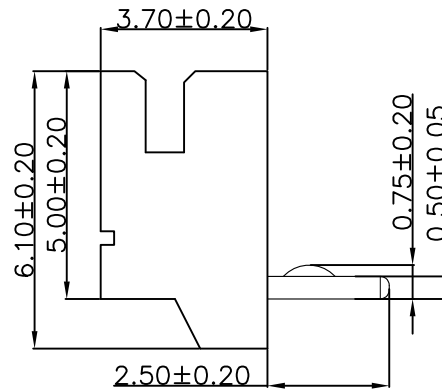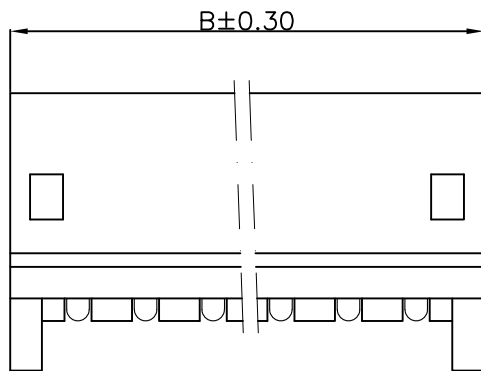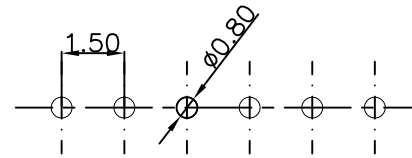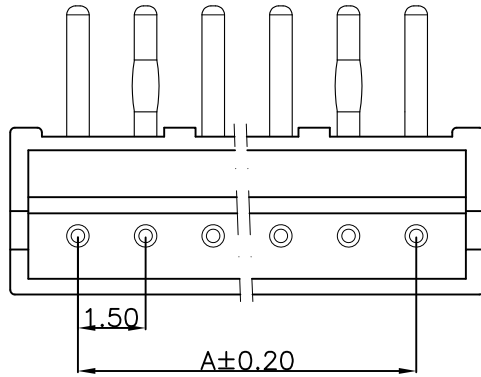

11	15.00	18.00			
10	13.50	16.50			
9	12.00	15.00			
8	10.50	13.50			
7	9.00	12.00			
6	7.50	10.50	16	22.50	25.50
5	6.00	9.00	15	21.00	24.00
4	4.50	7.50	14	19.50	22.50
3	3.00	6.00	13	18.00	21.00
2	1.50	4.50	12	16.50	19.50
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.06	SCALE	UNIT	mm	SCONDAR ELECTRONIC LIMITED
A1	2021.07.06	Changed from SCT1501WR-xxP to SCT1501WR-xxGOBE102			X.X	±0.35						
AO	2006.05.02	NEW			X.XX	±0.25						
					X.XXX	±0.15	Lisa	2021.07.06		SHEET	1/1	PART NO. SCT1501WR-xxGOBE102
					Angle	± 3'	Allen	2021.07.06	PROJ.	TITLE:	ZH 1.50mm 90° Wafer	

