RoHS

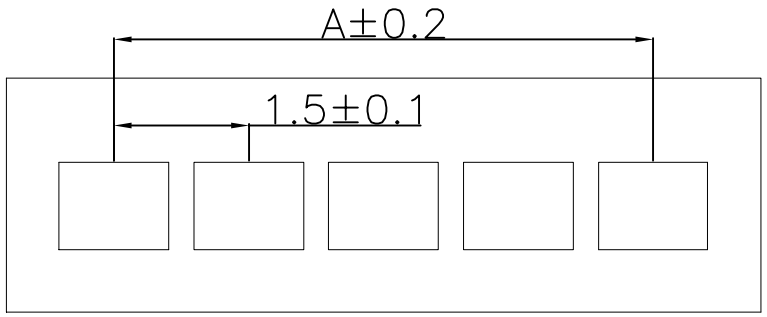




Specifications:
Poles:2~20 Poles
Pitch between poles: 1.5mm
Rated Voltage:50V AC,DC
Rated Current:0.7A(26AWG)
Withstand voltage:500V AC/minute
Contact Resistance:20mΩ (MAX)
Insulation Resistance:500MΩ(MIN)
Temperature Range:-25℃+85℃
Applicable Wire Range:26AWG-30AWG
Material: Nylon66 UL94V-0/2

-Q'TY: 1000Pcs/Bag

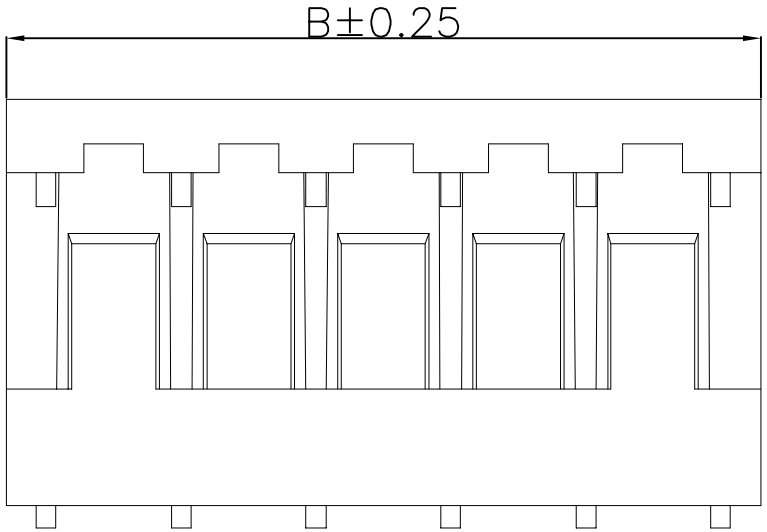


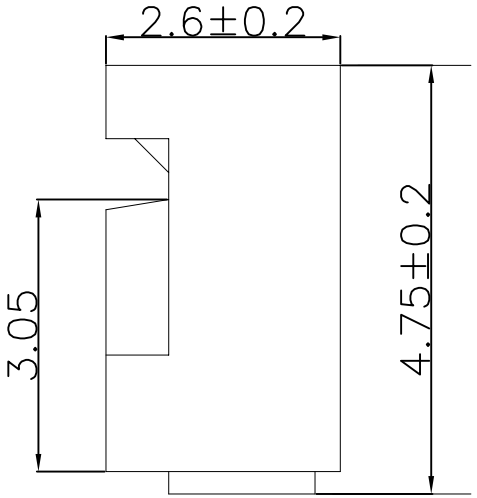


| PIN | DIM mm | |
|---|---|---|
| | A | B |
| 02 | 1.5 | 3.9 |
| 03 | 3.0 | 5.4 |
| 04 | 4.5 | 6.9 |
| 05 | 6.0 | 8.4 |
| 06 | 7.5 | 9.9 |
| 07 | 9.0 | 11.4 |
| 08 | 10.5 | 12.9 |
| 09 | 12.0 | 14.4 |
| 10 | 13.5 | 15.9 |
| 11 | 15.0 | 17.4 |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE |
|---|---|---|---|---|
| A0 | 2019.03.12 | NEW | | |

| OPERATION | | | | |
|---|---|---|---|---|
| X.X | ±0.35 | DRAW | Yang | 2022.05.20 |
| X.XX | ±0.25 | DESIGN | | |
| X.XXX | ±0.15 | CHECK | Lisa | 2022.05.20 |
| Angle | ± 3° | APPROVE | | |
| DIM | TOL | | | |

| | |
|---|---|
| SCALE | — |
| UNIT | mm |
| SIZE | A4 |
| SHEET | 1/1 |
| PROJ. | |

SCONDAR ELECTRONIC LIMITED

| | |
|---|---|
| PART NO. | SCT1502HR-xxBWT144 A1 |
| TITLE: | SZN 1.50mm Pitch 90° Housing Connector |