

RoHS

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 200V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: White
- Q'TY: 1000Pcs/Bag



Ordering Information

SCT1502HV- xx B WT 144


No.of Pins
See Table

Insulation
B=PA66


Color
WT=White

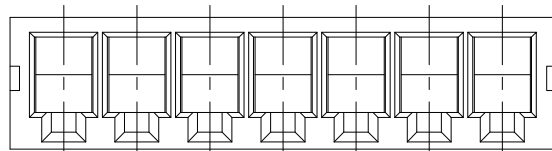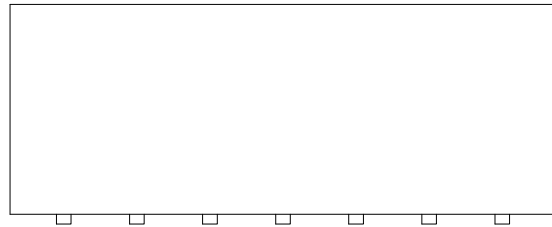

1.50±0.10
A±0.20

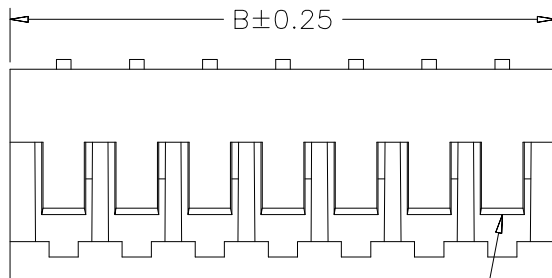

B±0.25






2.45±0.20

4.50±0.20
4.80±0.20

Circuit 1

11	15.00	17.20			
10	13.50	15.70			
9	12.00	14.20			
8	10.50	12.70			
7	9.00	11.20			
6	7.50	9.70			
5	6.00	8.20	15	21.00	23.20
4	4.50	6.70	14	19.50	21.70
3	3.00	5.20	13	18.00	20.20
2	1.50	3.70	12	16.50	18.70
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.15	SCALE	-	 SCONDAR ELECTRONIC LIMITED
A1	2021.07.15	Changed from SCT1502HV-xxP to SCT1502HV-xxBWT144			X.X	±0.35			UNIT	mm	
AO	2019.03.12	NEW			X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15		2021.07.15	SHEET	1/1	
					Angle	± 3'			PART NO.	SCT1502HV-xxBWT144	
					DIM	TOL	APPROVE	Allen	2021.07.15	PROJ.	
									TITLE:	SZN 1.50mm Pitch 180° Housing Connector	