
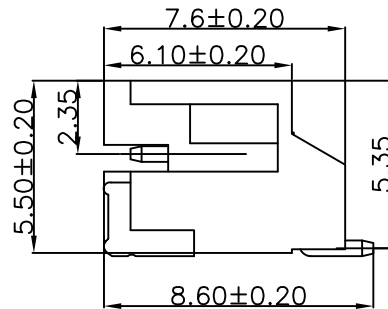
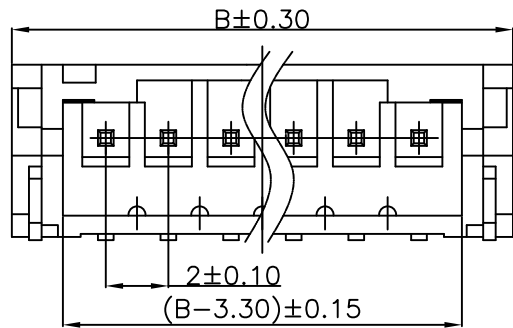
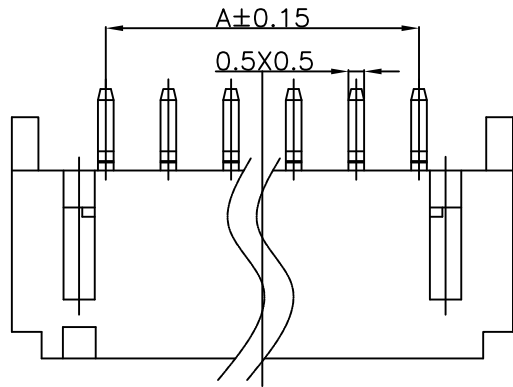


RoHS

Recommended P.C.B Layout

General Tolerance ± 0.05

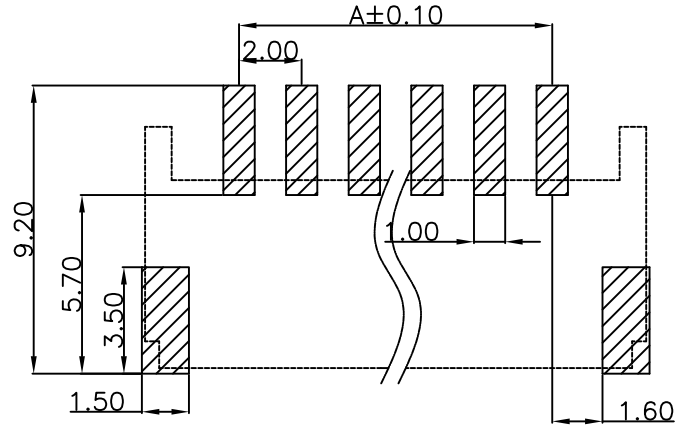

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 9T (UL94V-0)
- Contacts: Brass Tin Plated
- Color: Beige

Ordering Information

SCT2001WRS - ** E * BE 102

No. of Pins See Table
 Insulation E=PA9T
 Package 1=Tape&Reel 2=Tube
 Color BE=Beige

10	18.00	24.00			
9	16.00	22.00			
8	14.00	20.00			
7	12.00	18.00	16	30.00	36.00
6	10.00	16.00	15	28.00	34.00
5	8.00	14.00	14	26.00	32.00
4	6.00	12.00	13	24.00	30.00
3	4.00	10.00	12	22.00	28.00
2	2.00	8.00	11	20.00	26.00
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.05	SCALE	UNIT	mm	SCONDAR ELECTRONIC LIMITED	
AO	2021.07.05	Changed from SCT2001WR-S-xxP to SCT2001WRS-xxExBE102			X.X	DESIGN				mm			SCONDAR ELECTRONIC LIMITED
AO	2006.05.02	NEW			X.XXX	CHECK	Lisa	2021.07.05		A4		SCONDAR ELECTRONIC LIMITED	
					Angle	APPROVE	Allen	2021.07.05		1/1			PART NO.
					DIM					PROJ.		TITLE:	PH 2.00mm 90° SMT Wafer

