

RoHS

Specification:

- Current Rating: 2.5A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 10mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: White

Ordering Information


SCT2004H - 2xx B WT 112


No.of Pins
See Table

Insulation
B=PA66

Color
WT=White

2*11	20.00	23.90	22.40				
2*10	18.00	21.90	20.40	2*20	38.00	41.90	40.40
2*9	16.00	19.90	18.40	2*19	36.00	39.90	38.40
2*8	14.00	17.90	16.40	2*18	34.00	37.90	36.40
2*7	12.00	15.90	14.40	2*17	32.00	35.90	34.40
2*6	10.00	13.90	12.40	2*16	30.00	33.90	32.40
2*5	8.00	11.90	10.40	2*15	28.00	31.90	30.40
2*4	6.00	9.90	8.40	2*14	26.00	29.90	28.40
2*3	4.00	7.90	6.40	2*13	24.00	27.90	26.40
2*2	2.00	5.90	4.40	2*12	22.00	25.90	24.40
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

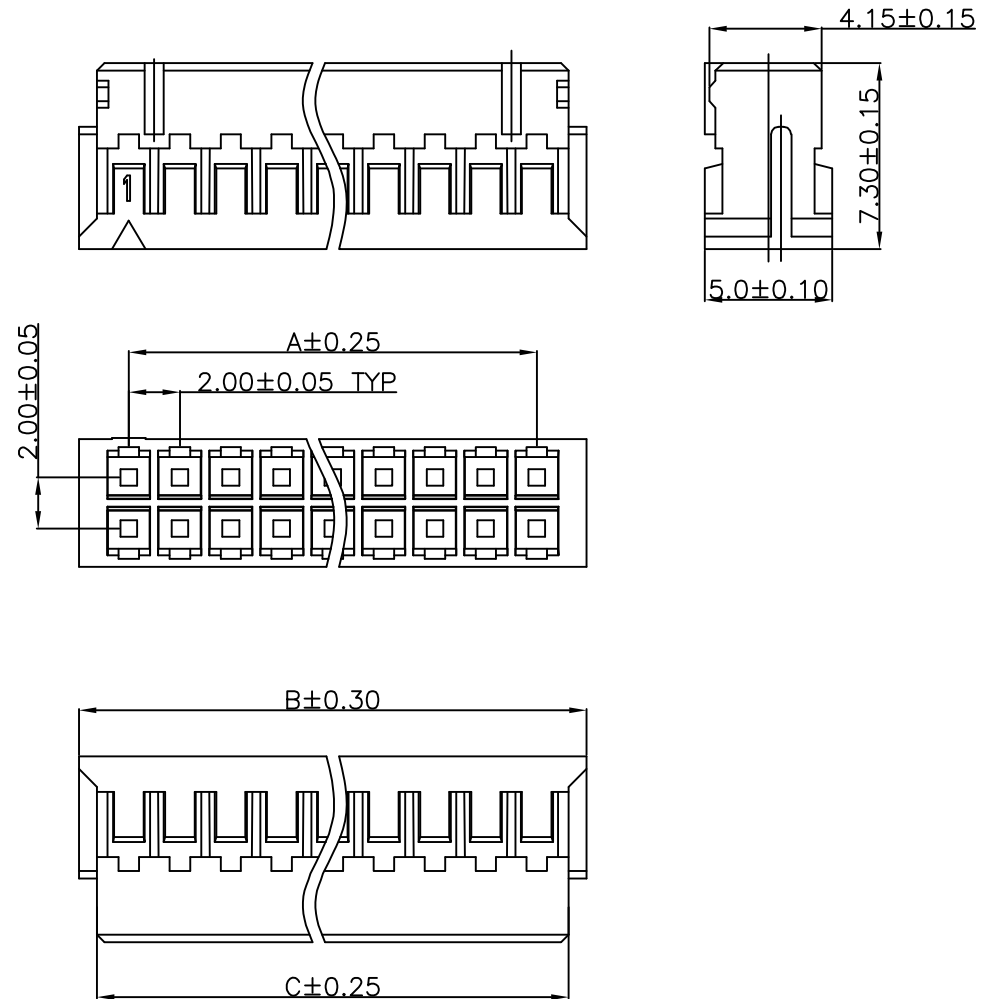

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.10	Changed from SCT2004H-2xxP to SCT2004H-2xxCWT103			X.X	±0.35			UNIT	mm		
AO	2010.04.02	NEW			X.XX	±0.25	Lisa	2021.07.10	SIZE	A4		
					X.XXX	±0.15	Allen	2021.07.10	SHEET	1/1		
					Angle	± 3'			PROJ.	⊕	PART NO.	SCT2004H-2xxBWT112
					DIM	TOL					TITLE:	PHD 2.00mm Pitch Housing Connector