
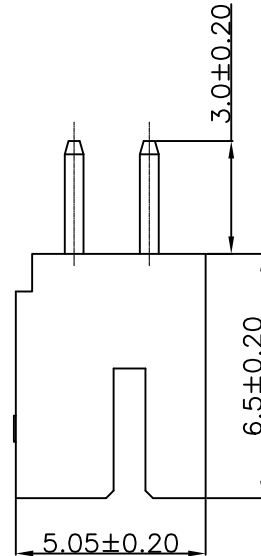


RoHS

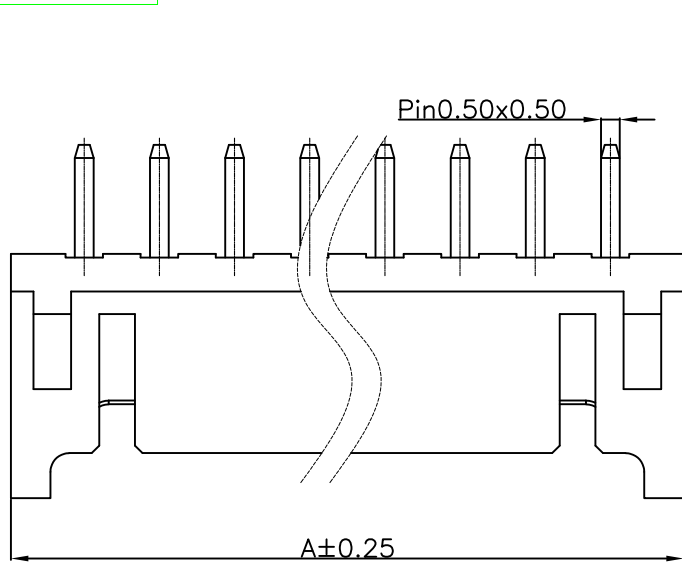

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C



Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Contacts: Brass Tin Plated
- Color: Beige

Ordering Information

SCT2004WV - 2** B 0 BE 102

No. of Pins See Table
 Insulation B=PA66
 Package 0=PE Bag
 Color BE=Beige

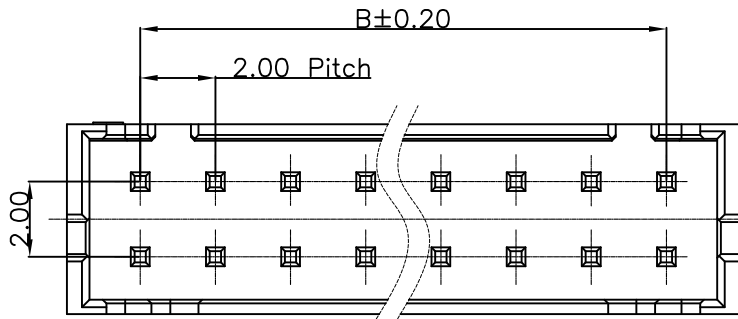

Recommended P.C.B Layout
 General Tolerance±0.05

2*10	22.00	18.00			
2*9	20.00	16.00			
2*8	18.00	14.00	2*17	36.00	32.00
2*7	16.00	12.00	2*16	34.00	30.00
2*6	14.00	10.00	2*15	32.00	28.00
2*5	12.00	8.00	2*14	30.00	26.00
2*4	10.00	6.00	2*13	28.00	24.00
2*3	8.00	4.00	2*12	26.00	22.00
2*2	6.00	2.00	2*11	24.00	20.00
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.10	SCALE	UNIT	mm	SCONDAR ELECTRONIC LIMITED
A1	2021.07.10	Changed from SCT2004WV-xxP to SCT2004WV-2xxB0BE102			X.X	±0.35				mm		
AO	2010.05.15	NEW			X.XX	±0.25	Lisa	2021.07.10		A4		
					X.XXX	±0.15	Allen	2021.07.10		1/1		PART NO. SCT2004WV-2xxB0BE102
					Angle	± 3'				PROJ.		TITLE: PHD 2.00mm 180° Wafer
					DIM	TOL						

