

RoHS

Recommended P.C.B Layout
General Tolerance±0.05

- Specification:
- Current Rating: 3A AC/DC
 - Voltage Rating: 250V AC/DC
 - Insulation Resistance: 1000MΩ(Min)
 - Contact resistance: 10mΩ(Max).
 - Withstanding Voltage: 800VAC(Min)
 - Operation Temperature: -25°C to +85°C
 - Applicable Wires: 22AWG~28AWG






- Material:
- Cover: PA46 UL94-V0 Black
 - Insulator: PA9T UL94-V0 Beige
 - Contact Pin: Brass Tin Plated
 - Soldering lug: Brass Tin Plated
 - Plating: Nickel 30~50u"
Tin Plated 100~140u"

Ordering Information

SCT2004WVS - 2** E 1 BE 102

No. of Pins See Table
Insulation E=PA9T
Package 1=Tape&Reel
Color BE=Beige

2*11	20.00	26.50			
2*10	18.00	24.50	2*20	38.00	44.50
2*9	16.00	22.50	2*19	36.00	42.50
2*8	14.00	20.50	2*18	34.00	40.50
2*7	12.00	18.50	2*17	32.00	38.50
2*6	10.00	16.50	2*16	30.00	36.50
2*5	8.00	14.50	2*15	28.00	34.50
2*4	6.00	12.50	2*14	26.00	32.50
2*3	4.00	10.50	2*13	24.00	30.50
2*2	—	8.50	2*12	22.00	28.50
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

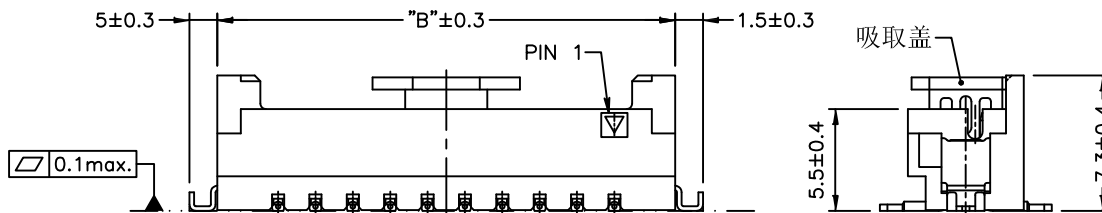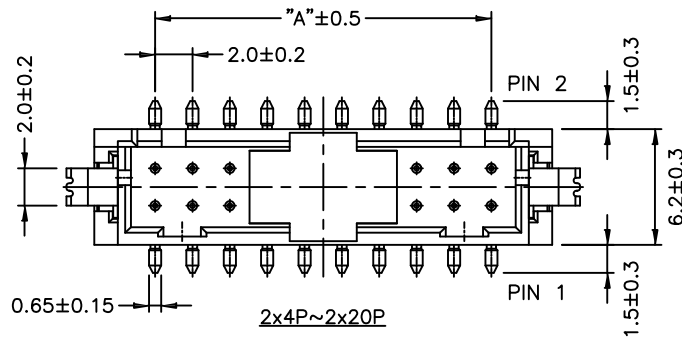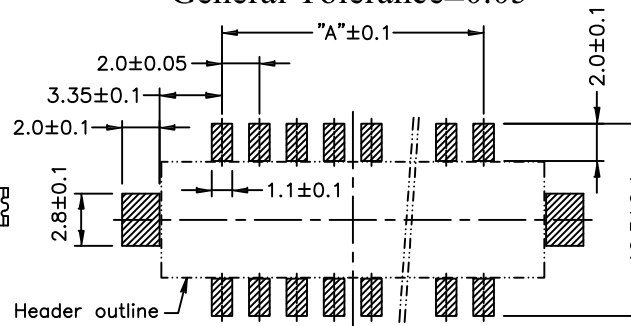

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.10	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.10	Changed from SCT2004WV-S-xxP to SCT2004WVS-2xxE1BE102			X.X	±0.35			UNIT	mm		
AO	2020.03.03	NEW			X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
					Angle	± 3'			PART NO.	SCT2004WVS-2xxE1BE102		
					DIM	TOL			PROJ.		TITLE:	2.00mm Pitch Wafer 180'SMT