

RoHS





- Specification:
- Current Rating: 3A AC/DC
 - Voltage Rating: 250V AC/DC
 - Insulation Resistance: 1000MΩ Min
 - Withstanding Voltage: 1000VAC(1Min)
 - Contact resistance: 20mΩ(Max).
 - Operation Temperature: -25°C to +85°C

- Material:
- Insulator (Housing): PA46 (UL94V-0)
 - Contacts: Brass Tin Plated
 - Color: Beige

Ordering Information

SCT2006WRS - ** G 0 BE 101

No. of Pins See Table
 Insulation G=PA46
 Package 0=PE Bag
 Color BE=Beige

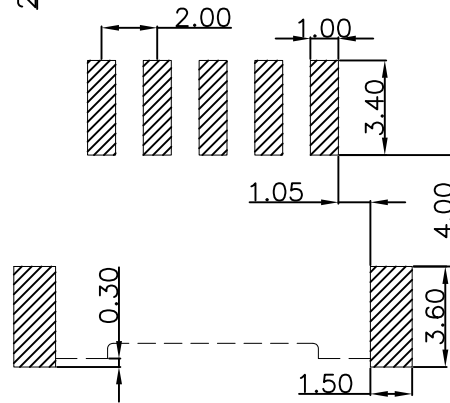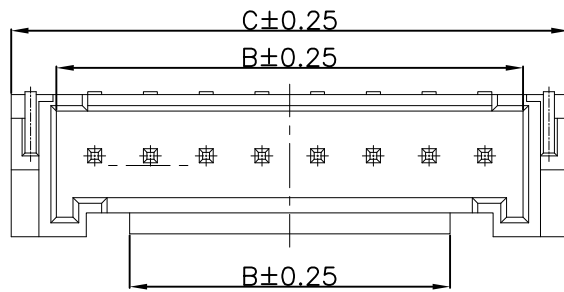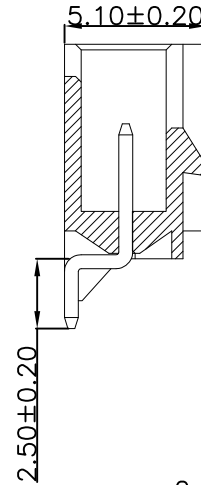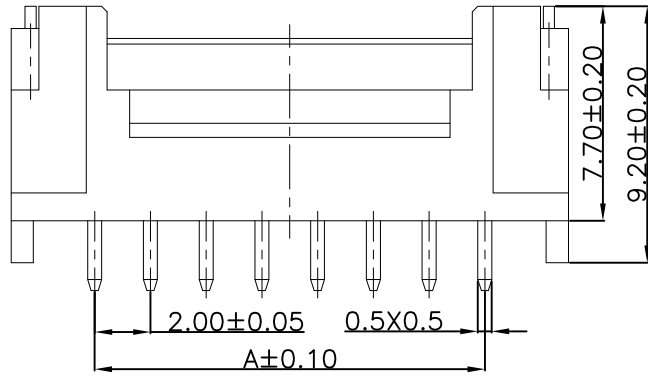

Recommended P.C.B Layout
 General Tolerance±0.05

9	16.00	18.75	22.00	13.50					
8	14.00	16.75	20.00	11.50	16	30.00	32.75	36.00	15.50
7	12.00	14.75	18.00	9.50	15	28.00	30.75	34.00	15.50
6	10.00	12.75	16.00	7.50	14	26.00	28.75	32.00	15.50
5	8.00	10.75	14.00	5.50	13	24.00	26.75	30.00	15.50
4	6.00	8.75	12.00	3.50	12	22.00	24.75	28.00	15.50
3	4.00	6.75	10.00	3.20	11	20.00	22.75	26.00	15.50
2	2.00	4.75	8.00	2.80	10	18.00	20.75	24.00	15.50
Poles	A	B	C	D	Poles	A	B	C	D
	Dimensions					Dimensions			

东莞市赛凯达电子科技有限公司
 工程专用章

受控

					OPERATION	DRAW	Peng	2021.07.10	SCALE		 SCONDAR ELECTRONIC LIMITED
					X.X ±0.35	DESIGN			UNIT	mm	
A1	2021.07.10	Changed from SCT2006WR-S-xxP to SCT2006WRS-xxG1BE101			X.XX ±0.25		CHECK	Lisa	2021.07.10	SIZE	
AO	2015.05.15	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.10	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE				PART NO.	SCT2006WRS-xxG1BE101	⚠
					Angle ± 3'				PROJ.	YH 2.00mm 90° SMT Wafer	
					DIM TOL				TITLE:		