
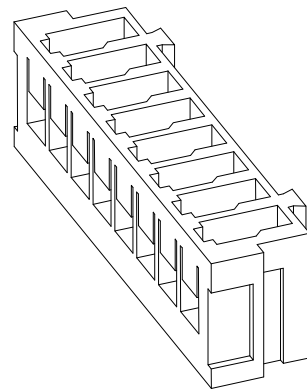
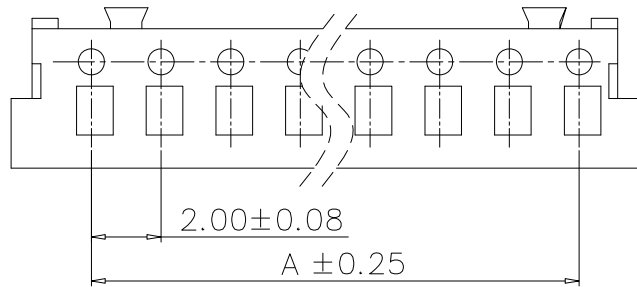

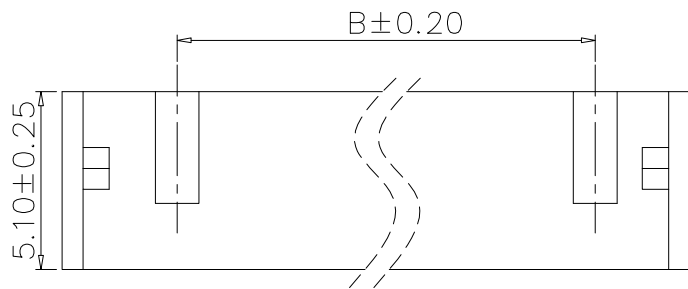


RoHS

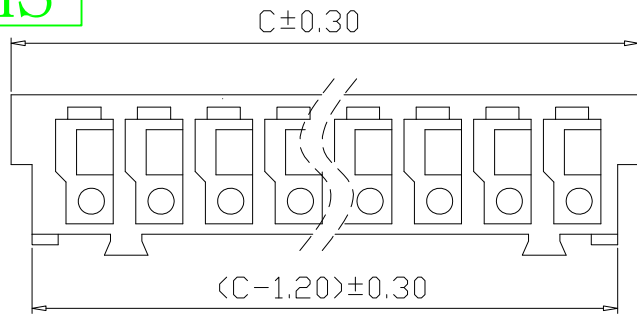

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-2)
- Color: White

Ordering Information

SCT2007H - xx B WT 112

No.of Pins See Table Insulation B=PA66 Color WT=White

10	18.00	16.00	22.00				
9	16.00	14.00	20.00				
8	14.00	12.00	18.00				
7	12.00	10.00	16.00				
6	10.00	8.00	14.00	15	28.00	26.00	32.00
5	8.00	6.00	12.00	14	26.00	24.00	30.00
4	6.00	4.00	10.00	13	24.00	22.00	28.00
3	4.00		8.00	12	22.00	20.00	26.00
2	2.00		6.00	11	20.00	18.00	24.00
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.15	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.15	Changed from SCT2007H-xxP to SCT2007H-xxBWT112			X.X	±0.35			UNIT	mm		
AO	2009.10.15	NEW			X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15		2021.07.15	SHEET	1/1		
					Angle	± 3'			PROJ.	⊕	PART NO.	SCT2007H-xxBWT112
					DIM	TOL		2021.07.15			TITLE:	AMP 2.00mm Pitch Housing Connector