


RoHS

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Applicable Wire:24-28AWG

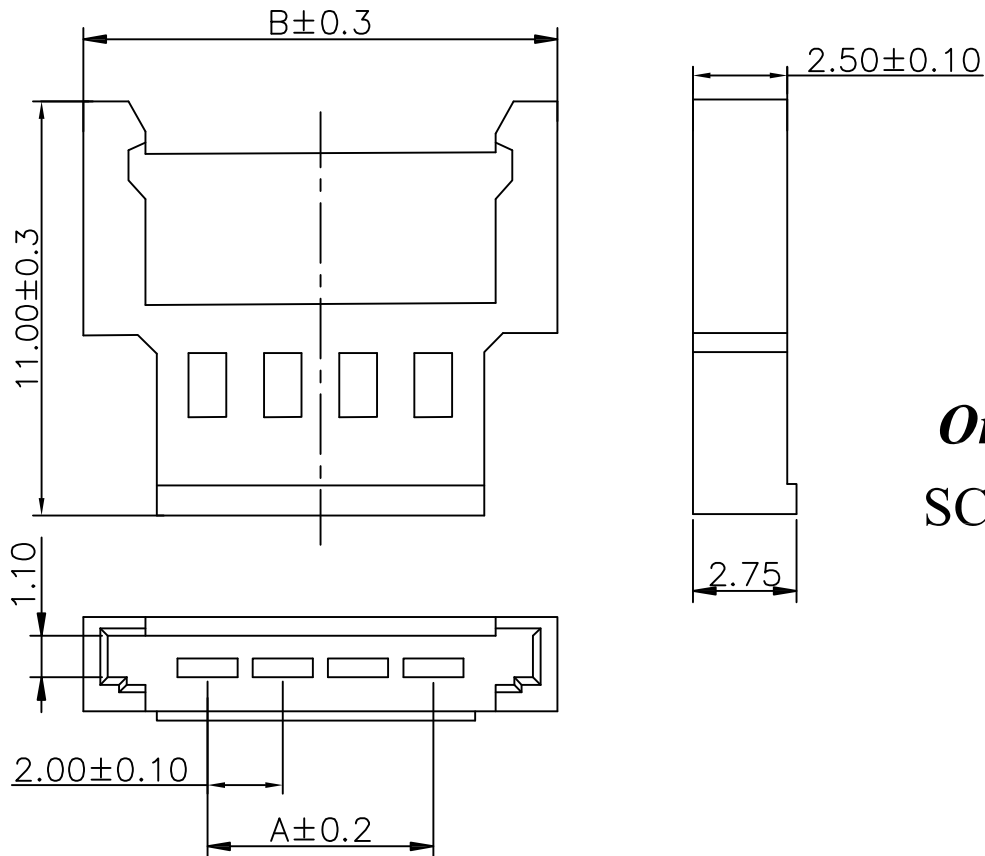

Ordering Information


SCT2008FH- \*\* B WT 149

No. of Pins  
See Table

Material:  
B=PA66 V0

Color  
WT=White

12	22.00	28.10
11	20.00	26.10
10	18.00	24.10
09	16.00	22.10
08	14.00	20.10
07	12.00	18.10
06	10.00	16.10
05	8.00	14.10
04	6.00	12.10
03	4.00	10.10
02	2.00	8.10
Poles	A	B
	Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
AO	2016.05.02	NEW			X.XXX	±0.15		2021.07.10	SHEET	1/1		PART NO.
					Angle	± 3'			PROJ.	☉	TITLE:	2.0mm Pitch Female Connector
					DIM	TOL	APPROVE	Allen	2021.07.10			