


RoHS

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 125V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 500VAC(Min)
- Operation Temperature: -25°C to +85°C

Material:

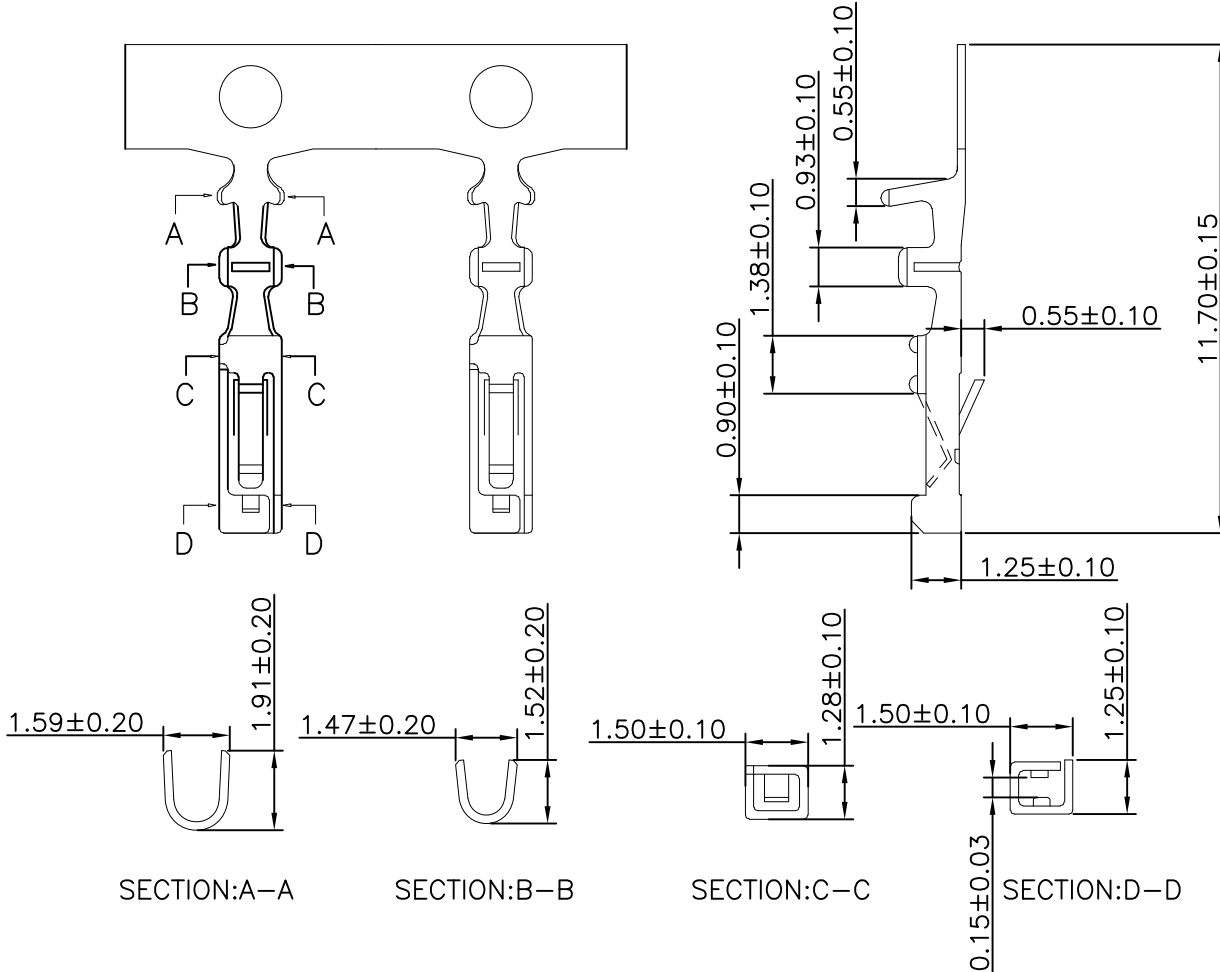


- Wire Range: 26AWG~28AWG
- Insulation O.D: 1.15mm Max
- Material: Phosphor Bronze, T=0.20mm
- Finish: Tin Plated
- Q'TY: 10,000Pcs/Reel



Ordering Information

SCT2008FT P S 112

Material:
P=Phosphor Bronze S=Tin Plated

					OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
					X.X ±0.35	DESIGN			UNIT	mm			
					X.XX ±0.25	CHECK	Lisa	2021.07.10	SIZE	A4			
A1	2021.07.10	Changed from SCT2008-FTPB to SCT2008FTPS112			X.XXX ±0.15	APPROVE	Allen	2021.07.10	SHEET	1/1	PART NO.	SCT2008FTPS112	
AO	2015.03.03	NEW			Angle ± 3'				PROJ.		TITLE:	MX51006 2.0mm Female Terminal	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE								