


RoHS

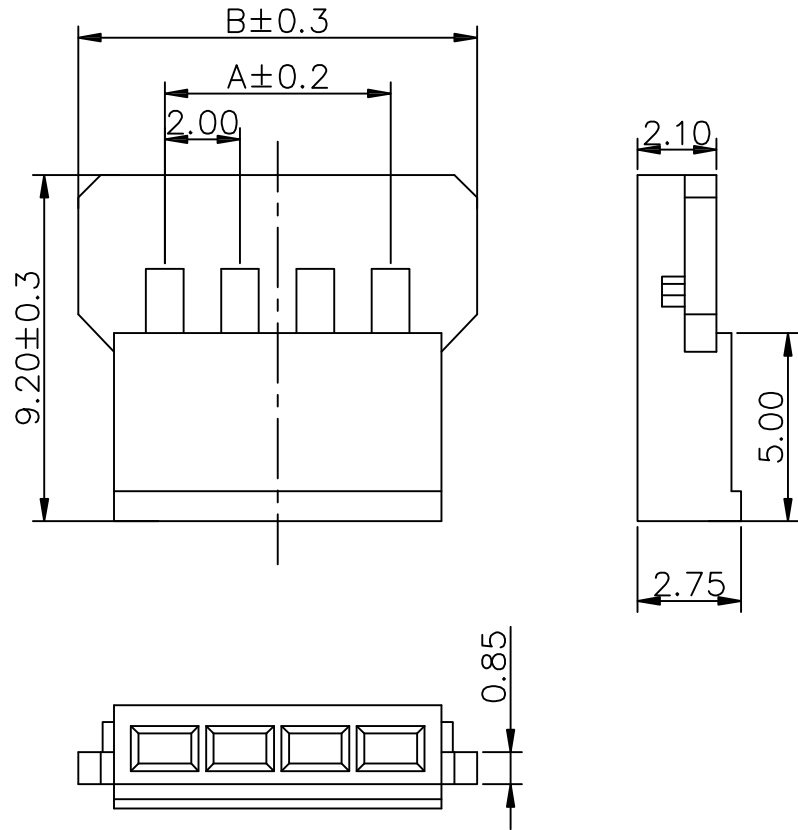

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Applicable Wire:24-28AWG

Ordering Information

SCT2008MH- \*\* B WT 149

No.of Pins See Table  
 Material: B=PA66 V0  
 Color WT=White

12	22.0	26.6
11	20.0	24.6
10	18.0	22.6
09	16.0	20.6
08	14.0	18.6
07	12.0	16.6
06	10.0	14.6
05	8.0	12.6
04	6.0	10.6
03	4.0	8.6
02	2.0	6.6
Poles	A	B
	Dimensions	

					OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
A1	2021.07.10	Changed from SCT2008MH-xxP to SCT2008MH-xxBWT149			X.XX	±0.25			SIZE	A4		
AO	2020.08.02	NEW			X.XXX	±0.15	Lisa	2021.07.10	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'	Allen	2021.07.10	PROJ.	⊕	PART NO.	SCT2008MH-xxBWT149
					DIM	TOL					TITLE:	2.0mm Pitch Male Connector