


RoHS

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 125V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 500VAC(Min)
- Operation Temperature: -25°C to +85°C

Material:


- Wire Range: 24AWG~28AWG
- Insulation O.D: 1.15mm Max
- Material: Phosphor Bronze, T=0.20mm
- Finish: Tin Plated
- Q'TY: 10,000Pcs/Reel

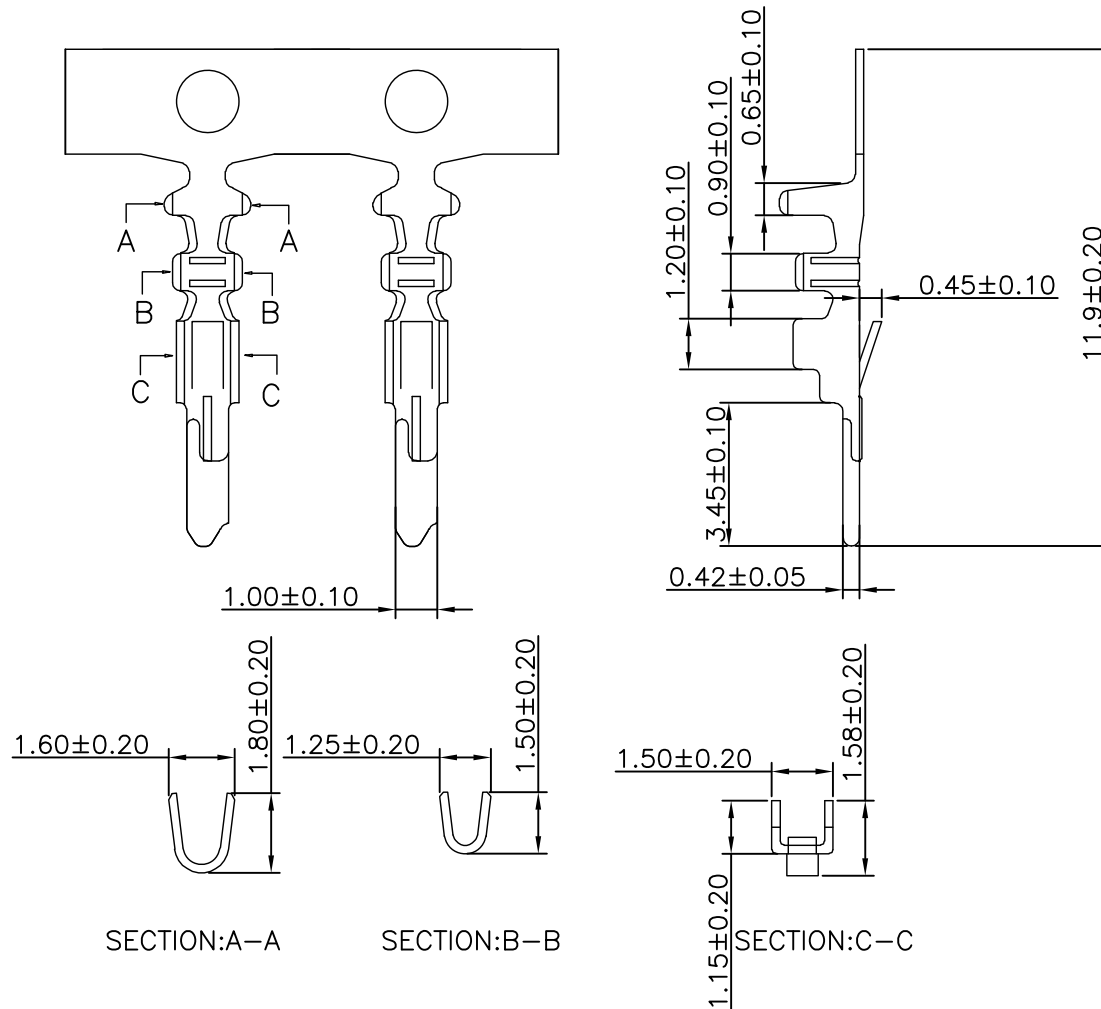

Ordering Information

SCT2008MT P S 112

Material:
P=Phosphor Bronze S=Tin Plated

					OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25				SIZE	A4		
A1	2021.07.10	Changed from SCT2008-MTPB to SCT2008MTPS112			X.XXX ±0.15	CHECK	Lisa	2021.07.10	SHEET	1/1	PART NO.	SCT2008MTPS112
AO	2015.03.03	NEW			Angle ± 3'	APPROVE	Allen	2021.07.10	PROJ.	⊕	TITLE:	MX51006 2.0mm Male Terminal
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL							