


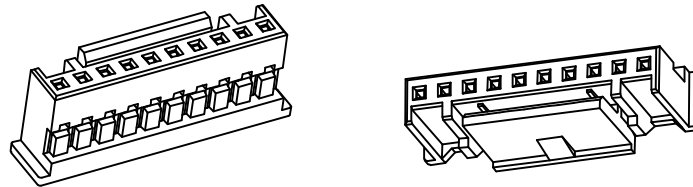

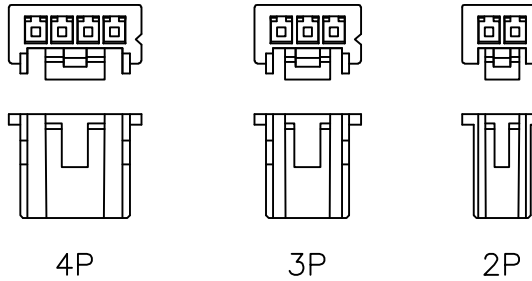


RoHS



东莞市锐凯达电子科技有限公司
工程专用章

受控

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PA66 (UL94V-0)
- Color: White/Black

Ordering Information

SCT2012H- xx B xx 112

No.of Pins
See Table

Insulation
B=PA66

Color
WT=White
BK=Black

10	22.10	20.34	18.00	11.10					
9	20.10	18.34	16.00	4.50					
8	18.10	16.34	14.00	4.50					
7	16.10	14.34	12.00	4.50	16	34.10	32.34	30.00	11.10
6	14.10	12.34	10.00	4.50	15	32.10	30.34	28.00	11.10
5	12.10	10.34	8.00	4.50	14	30.10	28.34	26.00	11.10
4	10.10	8.34	6.00	4.50	13	28.10	26.34	24.00	11.10
3	8.10	6.34	4.00	3.45	12	26.10	24.34	22.00	11.10
2	6.10	4.34	2.00	2.60	11	24.10	22.34	20.00	11.10
Poles	A	B	C	D	Poles	A	B	C	D
	Dimensions					Dimensions			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.15	SCALE	-	 SCONDAR ELECTRONIC LIMITED
A1	2021.07.15	Changed from SCT2012H-xxP to SCT2012H-xxBWT112			X.X	±0.35			UNIT	mm	
AO	2009.10.15	NEW			X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15		2021.07.15	SHEET	1/1	
					Angle	± 3'			PART NO.	SCT2012H-xxBWT112	
					DIM	TOL	APPROVE	Allen	2021.07.15	PROJ.	
									TITLE:	PA 2.00mm Pitch Housing Connector	