


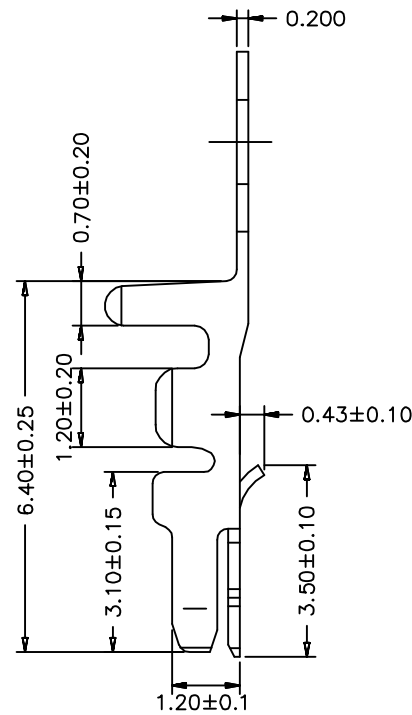


RoHS

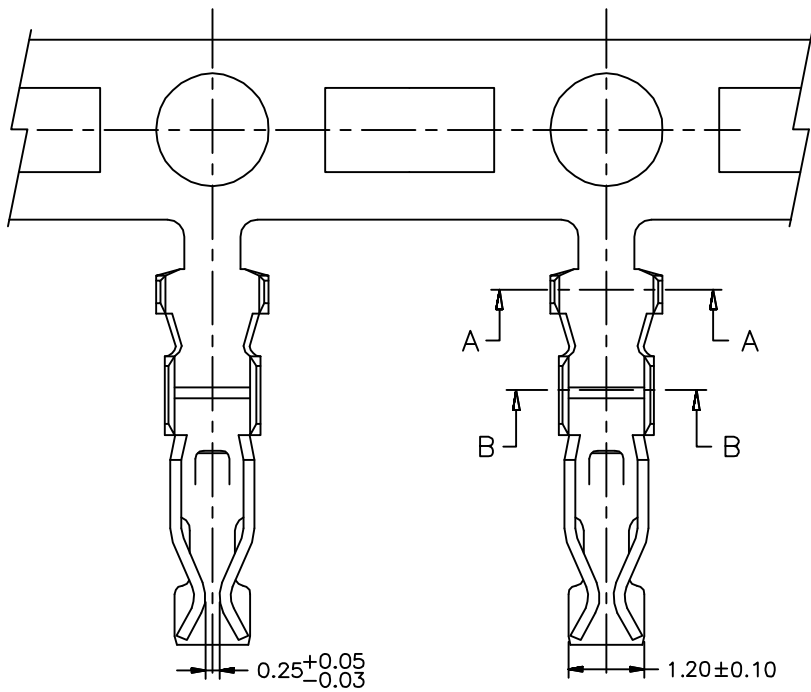

SECTION:A-A



SECTION:B-B

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 125V AC/DC
- Insulation Resistance: 800MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 500VAC(Min)
- Operation Temperature: -25°C to +85°C



Material:

- Wire Range: 22AWG~28AWG
- Material: Phosphor Bronze, T=0.20mm
- Finish: Tin Plated

Ordering Information

SCT2012T P S 112

Material:  
P=Phosphor Bronze S=Tin Plated

					OPERATION	DRAW	Peng	2021.07.15	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
					X.X ±0.35	DESIGN			UNIT	mm			
					X.XX ±0.25		CHECK	Lisa	2021.07.15	SIZE		A4	
					X.XXX ±0.15	APPROVE	Allen	2021.07.15	SHEET	1/1		PART NO.	SCT2012TPS112
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 3' TOL			PROJ.		TITLE:	PA 2.0mm Terminal	