

RoHS

Recommended P.C.B Layout
General Tolerance±0.05





- Specification:
- Current Rating: 3A AC/DC
 - Voltage Rating: 250V AC/DC
 - Insulation Resistance: 1000MΩ Min
 - Withstanding Voltage: 800VAC(1Min)
 - Contact resistance: 10mΩ(Max).
 - Operation Temperature: -25°C to +85°C

- Material:
- Insulator (Housing): PA9T (UL94V-0)
 - Contacts:Brass
 - Color: Beige

Ordering Information

SCT2012WRS - ** E 0 BE 107

No.of Pins See Table Insulation E=PA9T Package 0=PE Bag Color BE=Beige

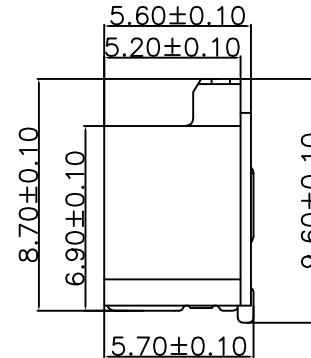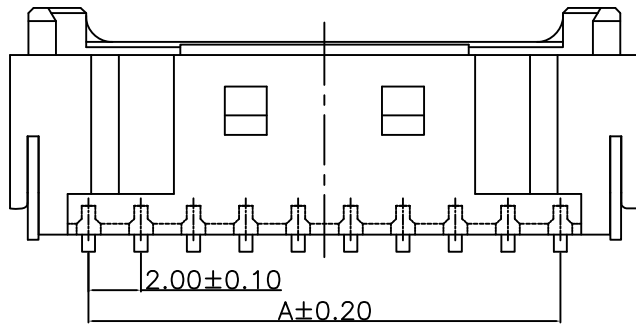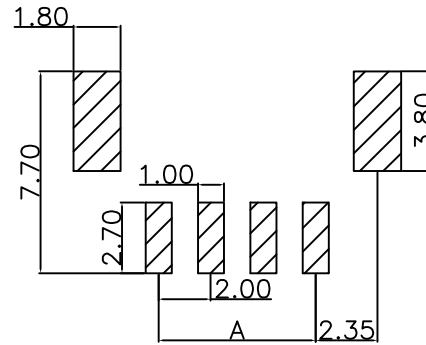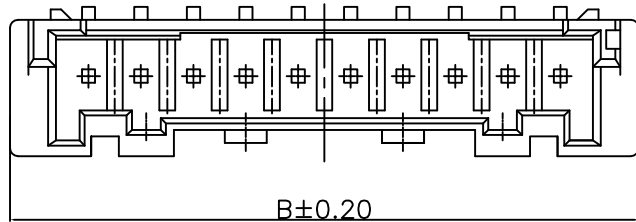

11	20.0	26.0			
10	18.0	24.0			
09	16.0	22.0			
08	14.0	20.0			
07	12.0	18.0			
06	10.0	16.0	16	30.0	36.0
05	8.0	14.0	15	28.0	34.0
04	6.0	12.0	14	26.0	32.0
03	4.0	10.0	13	24.0	30.0
02	2.0	8.0	12	22.0	28.0
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

东莞市赛凯达电子科技有限公司
工程专用章

受控

					OPERATION	DRAW	Peng	2021.07.15	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
A1	2021.07.15	Changed from SCT2012WR-S-xxP to SCT2012WRS-xxE0BE107			X.XX	±0.25	DESIGN		SIZE	A4		
AO	2006.05.02	NEW			X.XXX	±0.15	CHECK	Lisa	2021.07.15	SHEET		1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'	APPROVE	Allen	2021.07.15	PROJ.	PART NO.	SCT2012WRS-xxE0BE107
					DIM	TOL					TITLE:	PA2.00mm Pitch 90° SMT Wafer Connector