
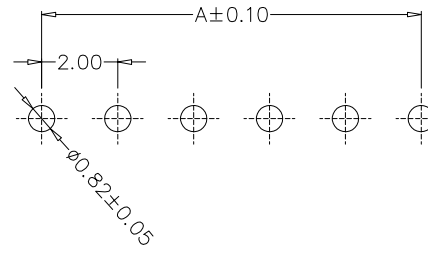
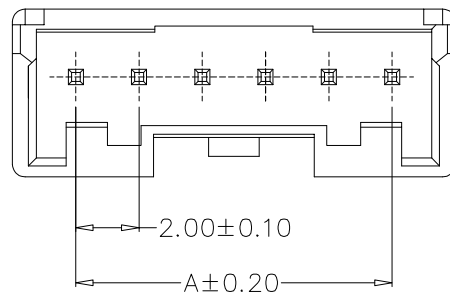
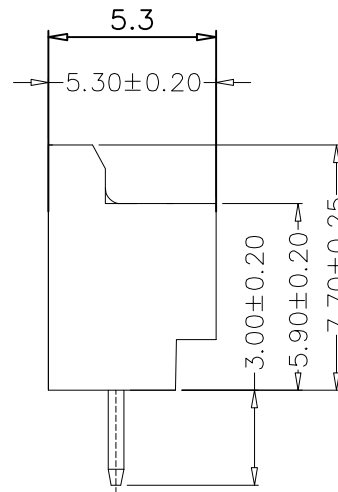


RoHS

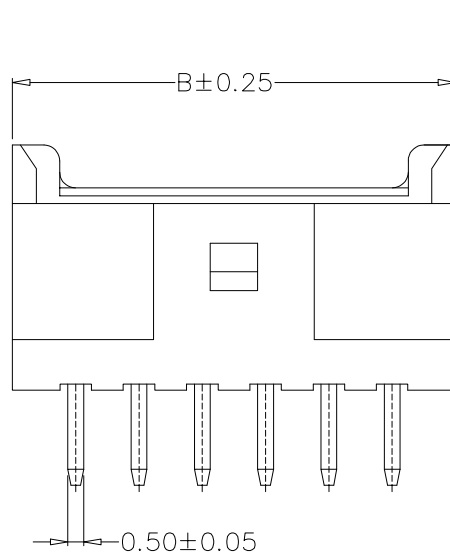

PCB LAYOUT

SCONDAR ELECTRONIC LIMITED
ENGINEER LIU APPROVED

Specification:
-Current Rating: 3A AC/DC
-Voitage Rating: 300V AC/DC
-Insulation Resistance: 1000MΩ Min
-Withstanding Voltage: 800VAC(1Min)
-Contact resistance: 10mΩ(Max).
-Operation Temperature: -25℃ to +85℃

Material:
-Insulator (Housing): PBT (UL94V-0)
-Contacts:Brass
-Color: White

Ordering Information

SCT2012WV - ** D 0 WT 182

No. of Pins
See Table

Insulation
D=PBT

Package
0=PE bag
1=Tape&Reel

Color
WT=WHITE

10	18.00	22.00			
9	16.00	20.00			
8	14.00	18.00			
7	12.00	16.00			
6	10.00	14.00			
5	8.00	12.00			
4	6.00	10.00			
3	4.00	8.00	12	22.00	26.00
2	2.00	6.00	11	20.00	24.90
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

					OPERATION	DRAW	zhong	2009.10.15	SCALE	—	 SCONDAR ELECTRONIC LIMITED
					X.X	±0.35	DESIGN		UNIT	mm	
					X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15		2009.10.15	SHEET	1/1	
AO	2009.10.15	NEW			Angle	± 3'	CHECK	Lisa	2009.10.15	PART NO.	SCT2012WV—xxDOWT182
REV	DATE	MODIFICATION DESCRIPTION			DIM	TOL	APPROVE	Allen	2009.10.15	PROJ.	TITLE: PA2.0mm XXP DIP WV PBT V0 Sokcet White