

RoHS

Recommended P.C.B Layout
General Tolerance±0.05

- Specification:
- Current Rating: 3A AC/DC
 - Voltage Rating: 250V AC/DC
 - Insulation Resistance: 1000MΩ Min
 - Withstanding Voltage: 800VAC(1Min)
 - Contact resistance: 10mΩ(Max).
 - Operation Temperature: -40°C to +105°C






- Material:
- Insulator (Housing): PA9T (UL94V-0)
 - Conductor: Brass/Matte Tin Plated
 - Solder Tabs: Brass/Matte Tin Plated
 - Color: Beige、 Natural

Ordering Information


SCT2012WVS - ** E 1 ** 107

No.of Pins See Table Insulation E=PA9T Package l=Tape&Reel Color BE=Beige NA=Natural

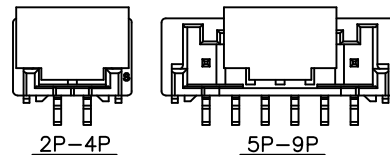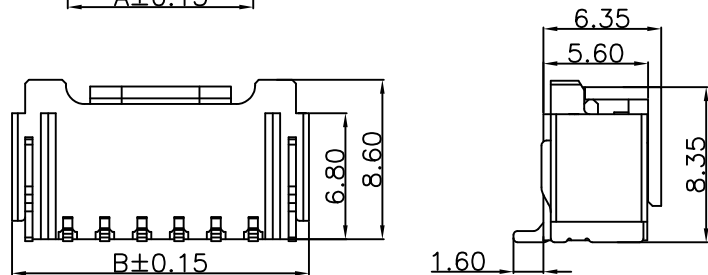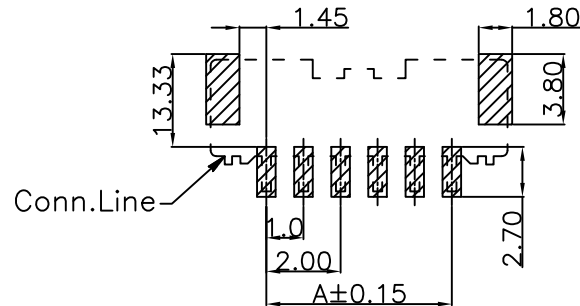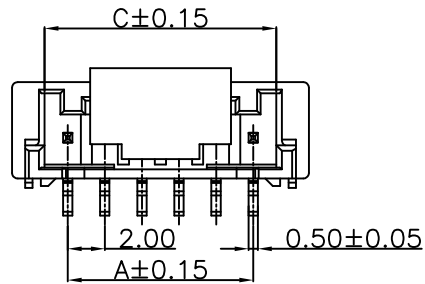

11	20.0	26.0	22.50				
10	18.0	24.0	20.50				
09	16.0	22.0	18.50				
08	14.0	20.0	16.50				
07	12.0	18.0	14.50				
06	10.0	16.0	12.50	16	30.0	36.0	32.50
05	8.0	14.0	10.50	15	28.0	34.0	30.50
04	6.0	12.0	8.50	14	26.0	32.0	28.50
03	4.0	10.0	6.50	13	24.0	30.0	26.50
02	2.0	8.0	4.50	12	22.0	28.0	24.50
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

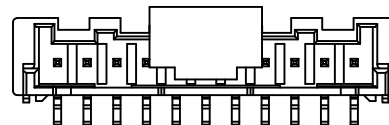

SCALE 0.8:1 SCALE 0.8:1



10P-16P
SCALE 0.8:1

					OPERATION	DRAW	Peng	2021.07.15	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.35	DESIGN			UNIT	mm	
	A1	2021.07.15	Changed from SSCT2012WV-S-xxP to SCT2012WVS-xxE1BE107		X.XX ±0.25		CHECK	Lisa	2021.07.15	SIZE	
	AO	2006.05.02	NEW		X.XXX ±0.15	APPROVE	Allen	2021.07.15	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM ± 3' TOL				PART NO.	SCT2012WVS-xxE1xx107	
									PROJ.	PA2.00mm Pitch 180° SMT Wafer Connector	