

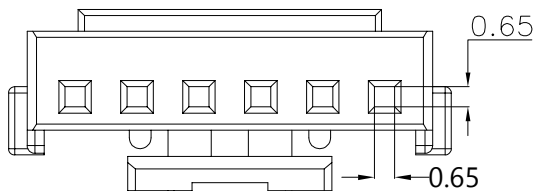

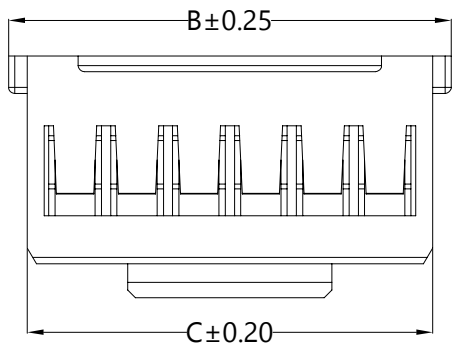
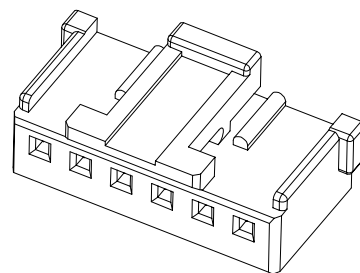


RoHS

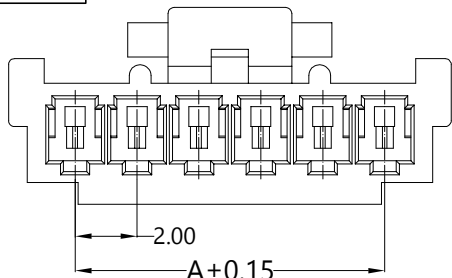

04P~20P Shape



02P~03P Shape

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 125V AC/DC
- Withstanding voltage: 1000V AC/minute
- Insulation Resistance: $\geq 1000M\Omega$ min
- Contact resistance: $\leq 20m\Omega$ (Max)
- Operation Temperature: -40° to $+105^{\circ}$

Material:

- Material: PA66 UL94V-0
- Color: White Color

Ordering Information

SCT2026H - xx B 0 WT 128

No. of Pins See Table
 Insulation B=PA66 V0 E=PA9T V0
 Package 0=PE Bag
 Color WT=White NA=Natural BE=Beige

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
2	2.00	7.30	5.10	12	22.00	26.30	25.10
3	4.00	9.30	7.10	13	24.00	28.30	27.10
4	6.00	10.30	9.10	14	26.00	30.30	29.10
5	8.00	12.30	11.10	15	28.00	32.30	31.10
6	10.00	14.30	13.10	16	30.00	34.30	33.10
7	12.00	16.30	15.10	17	32.00	36.30	35.10
8	14.00	18.30	17.10	18	34.00	38.30	37.10
9	16.00	20.30	19.10	19	36.00	40.30	39.10
10	18.00	22.30	21.10	20	38.00	42.30	41.10
11	20.00	24.30	23.10				

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LYAO

					OPERATION	DRAW	YANG	2016.08.06	SCALE	—	<p>SCONDAR ELECTRONIC LIMITED</p>
					X.X ±0.30	DESIGN			UNIT	mm	
					X.XX ±0.20	CHECK	Lisa	2016.08.06	SIZE	A4	
A0	2016.07.06	NEW			X.XXX ±0.10	APPROVE			SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	APPROVE			PROJ.	TITLE:	MX2.0mm 35507 Sherlock Wire-to-Board Natural XX Circuits Housing PA66 V0 White