

RoHS

Specifications(规格):

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 6.5A AC / DC
- Withstanding voltage(耐压值): 800V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): 1000M
- Contact resistance(接触电阻): 20m
- After environmental testing(环境测试后): 40m

Wafer (针座)

- Part No. (料号): SCT2027
- Poles (PIN数): 2-6
- Material (材质): PA6T UL 94V-0  
Pin 针: Brass (黄铜)  
Finish: Gold Flash (镀金)  
定位片: Brass (黄铜)  
Finish: Tin-Plated (镀锡)








Ordering Information

SCT2027WRS - \*\* A 1 BK 182

No. of Pins See Table    Insulation A=PA6T    Package I=Tape&Reel    Color BK=Black

Contacts	Dimensions(mm)	
	Dim A	Dim B
2	7.95	2
3	9.95	4
4	11.95	6
5	13.95	8
6	15.95	10
7	17.95	12
8	19.95	14
9	21.95	16

SCONDAR ELECTRONIC LIMITED  
ENGINEER LIU APPROVED

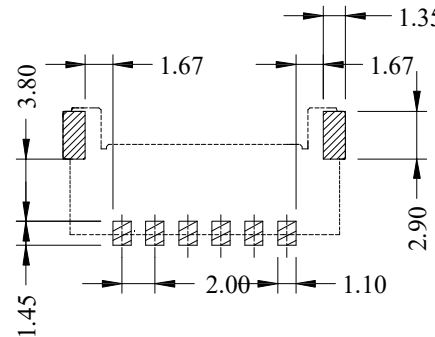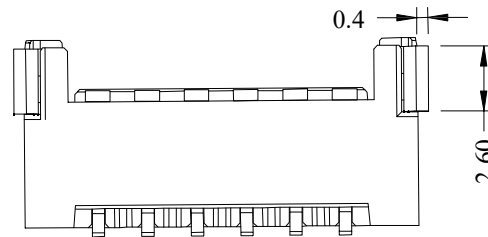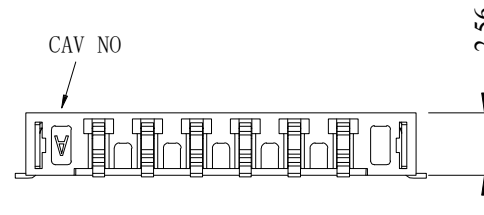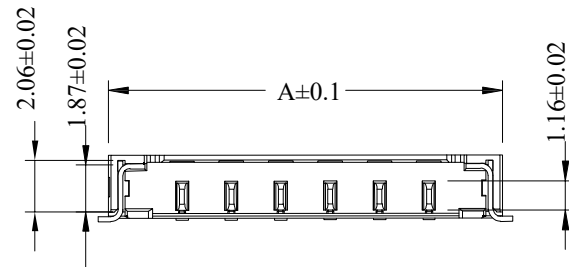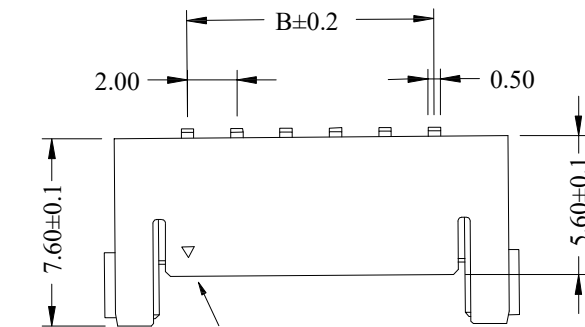

						OPERATION	DRAW	zhong	2009.10.15	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
						X.X ±0.35	DESIGN			UNIT	mm		
						X.XX ±0.25		CHECK	Lisa	2009.10.15	SIZE		A4
AO	2009.10.15	NEW				X.XXX ±0.15	APPROVE	Allen	2009.10.15	SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL		PROJ.	⌀	TITLE:	MX2.00mm SMT WR Wafer Connector