


RoHS

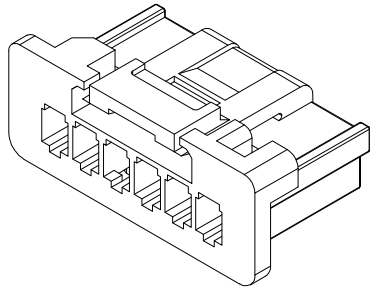








■ Specifications

- Voltage rating: 125V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 500V AC/minut
- Temperature range: -25°~+105°
- Insulation resistance: ≥1000M
- Contact resistance: ≤20mΩ
- Material: PBT White UL94-V0

Ordering Information

SCT2028H - ** D 0 WT 182

No. of Pins See Table Insulation D=PBT Package 0=Bag Color WT=White

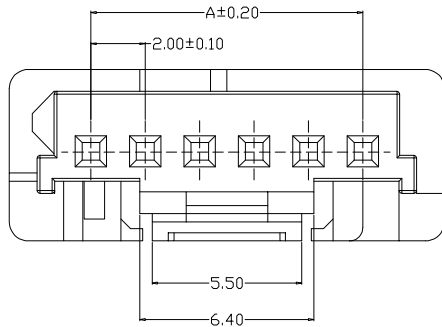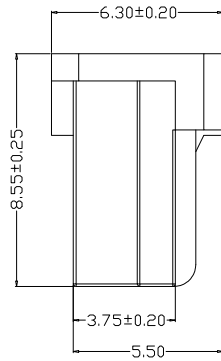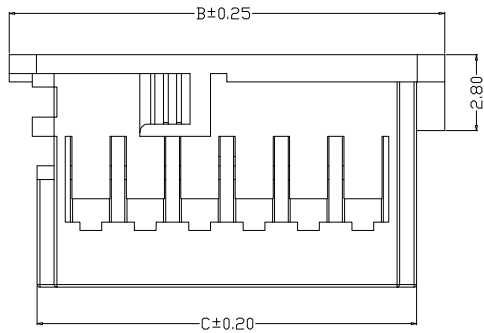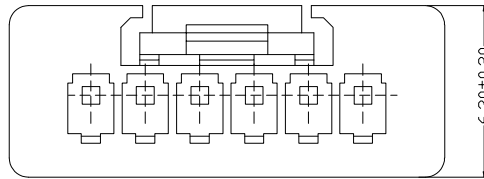

P/N	Dimension (MM)		
	A	B	C
02Y	2.00	8.00	6.00
03Y	4.00	10.00	8.00
04Y	6.00	12.00	10.00
05Y	8.00	14.00	12.00
06Y	10.00	16.00	14.00
07Y	12.00	18.00	16.00
08Y	14.00	20.00	18.00
09Y	16.00	22.00	20.00
10Y	18.00	24.00	22.00
11Y	20.00	26.00	24.00
12Y	22.00	28.00	26.00
13Y	24.00	30.00	28.00
14Y	26.00	32.00	30.00
15Y	28.00	34.00	32.00

SCONDAR ELECTRONIC LIMITED
ENGINEER LIU APPROVED

OPERATION	DRAW	Zhong	2020.09.16	SCALE	—
X.X ±0.30	DESIGN			UNIT	mm
X.XX ±0.20					
X.XXX ±0.10	CHECK	Lisa	2020.09.16	SIZE	A4
Angle ±3°					
DIM TOL	APPROVE			SHEET	1/1
				PROJ.	◆

SCONDAR
SCONDAR ELECTRONIC LIMITED

Part No. SCT2028H-xxDOWT182

TITLE: MX2.0mm 502351 PBT V0 XXPin WT Housing Bag

A0		NEW		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE