


RoHS

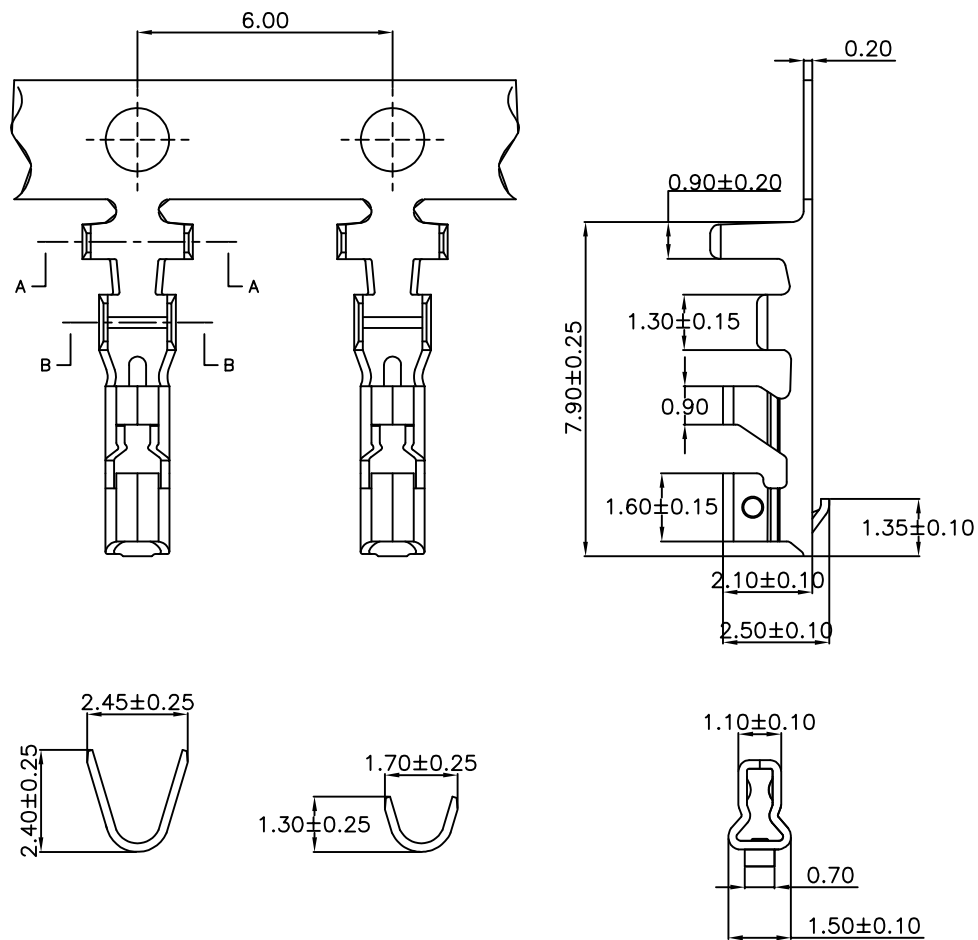

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C
- Material:
Phosphoric bronze T=0.20mm
- Finish: Tin-plated
- Applicable Wire Sizes:
24~30 AWG



Ordering Information

SCT2030 T P S 182

Material
P=Phosphor Bronze

Contact Plated
S=Tin Plated

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LYAO

					OPERATION	DRAW	Peng	2021.07.06	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.35	DESIGN			UNIT	mm	
					X.XX ±0.25	CHECK	Lisa	2021.07.06	SIZE	A4	
					X.XXX ±0.15	APPROVE	Allen	2021.07.06	SHEET	1/1	
AO	2021.07.06	NEW			Angle ± 3'				PART NO.	SCT2030TPS182	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE				PROJ.	 TITLE: SPH 2.00mm Phosphor Bronze Tin plated terminal	