

RoHS

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:



- Material :Wafer PA66 ,UL94V-0
- PIN Brass Tin-plated
- Color: White

Ordering Information

SCT2030WR - 2xx B 0 WT 182

No. of Pins See Table
Insulation B=PA66 V0
0=PE Bag
Color WT=White

Poles	Dimensions	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00
17	32.00	36.00
18	34.00	38.00
19	36.00	40.00
20	38.00	42.00

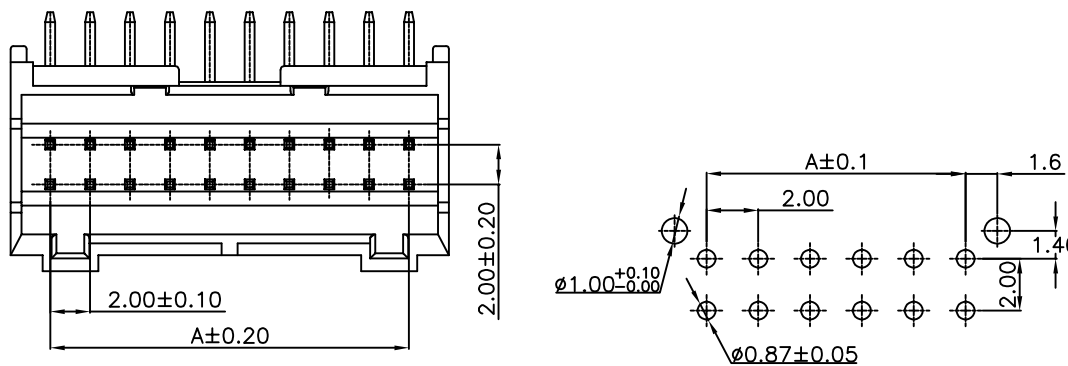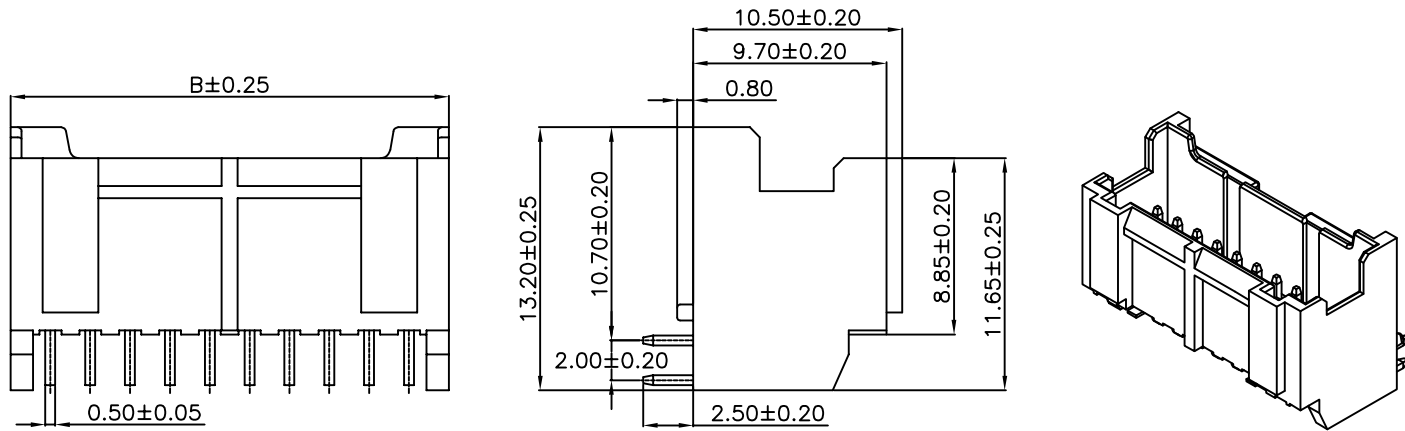

PCB LAYOUT

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LYAO

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.16	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
					Angle	± 3'			PART NO.	SCT2030WR-2xxBOWT182		
					DIM	TOL	APPROVE	Allen	2021.07.16	PROJ.	TITLE:	SPH 2.00mm PA66 V0 White 2xxP WR Sokcet