
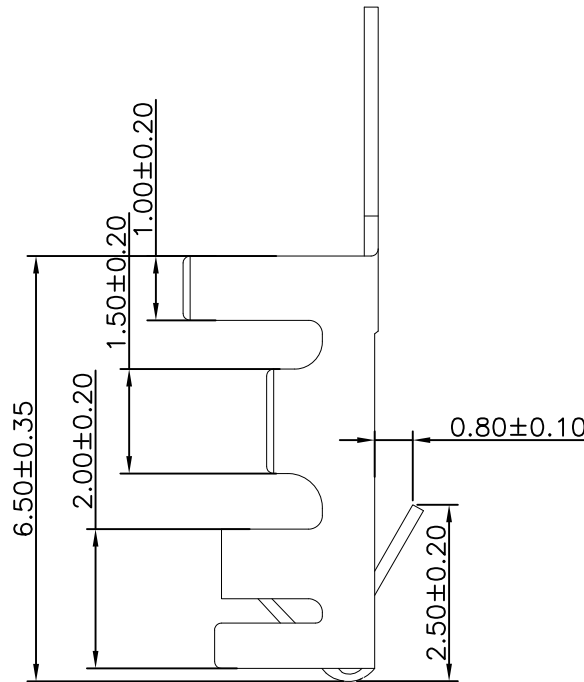


RoHS

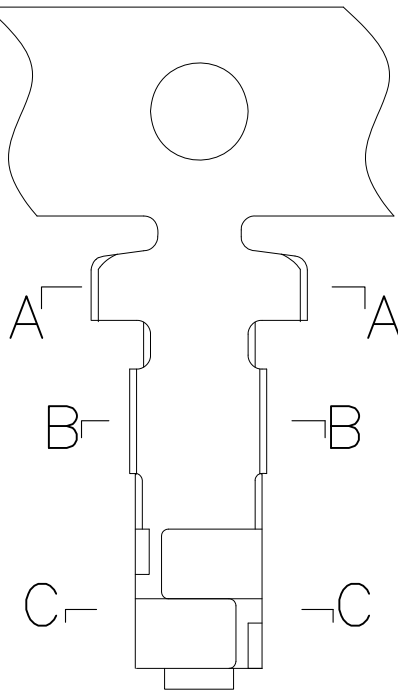

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 1000VAC(Min)
- Operation Temperature: -25°C to +85°C


Material:

- Wire Range: 22AWG~28AWG(OD:1.9mm)
- Material: Phosphor Bronze, T=0.20mm
- Finish: Tin Plated
- Q'TY: 8500Pcs/Reel


Ordering Information

SCT2502T P S 102


Material:
P=Phosphor Bronze S=Tin Plated




SECTION:A-A



SECTION:B-B

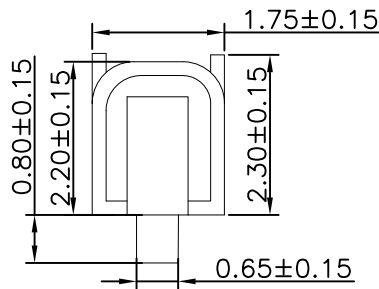

SECTION:C-C



					OPERATION	DRAW	Peng	2021.07.06	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
					X.X ±0.35	DESIGN			UNIT	mm			
					X.XX ±0.25				SIZE	A4			
A1	2021.07.06	Changed from SCT2502TP to SCT2502TPS102			X.XXX ±0.15	CHECK	Lisa	2021.07.06	SHEET	1/1	PART NO.	SCT2502TPS102	
AO	2015.03.03	NEW			Angle ± 3'	APPROVE	Allen	2021.07.06	PROJ.		TITLE:	XHA 2.50mm Terminal	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL								