


RoHS

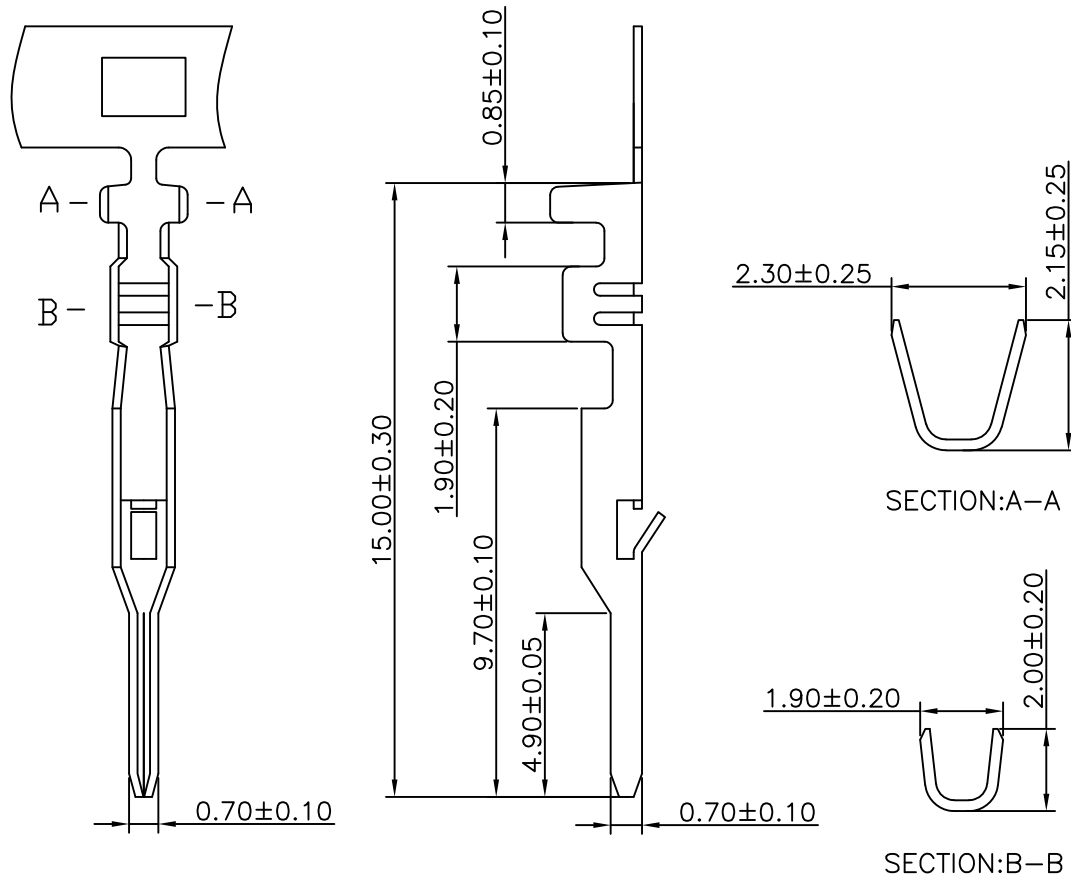

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 800MΩ(Min)
- Withstanding Voltage: 500VAC(Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:


- Wire Range: 22AWG~28AWG(OD:1.8mm)
- Material: Brass, T=0.20mm
- Finish: Tin Plated
- Q'TY: 10,000Pcs/Reel

Ordering Information

SCT2508MT B S 115

Material:  
B=Brass

Contact Plated  
S=Tin Plated

					OPERATION	DRAW	Peng	2021.07.07	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25		CHECK	Lisa	2021.07.07	SIZE		A4
A1	2021.07.07	Changed from SCT2508MTP to SCT2508MTBS115			X.XXX ±0.15	APPROVE	Allen	2021.07.07	SHEET	1/1		PART NO.
AO	2015.03.03	NEW			Angle ± 3'				PROJ.	⌀	TITLE:	MX5240 2.50mm Male Terminal
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL							