
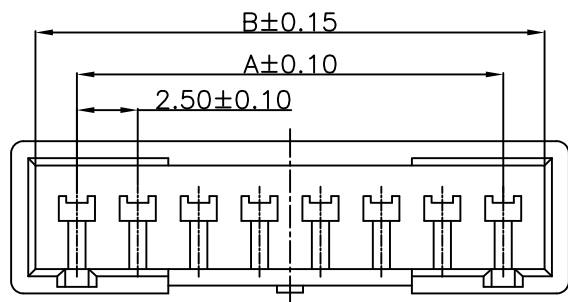


RoHS

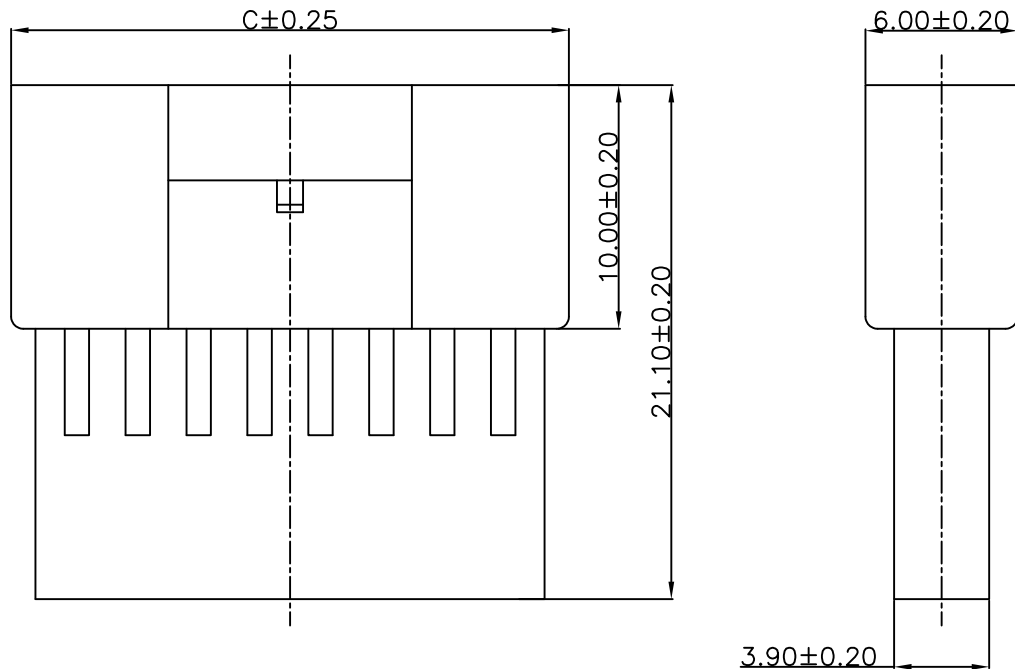

东莞市晟凯达电子科技有限公司  
工程专用章

受控

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 800MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-2)
- Color: White

Ordering Information

SCT2509FH - xx C WT 115

No.of Pins  
02=2Pin

Insulation  
C=PA66 V2

Color  
WT=White

10	22.50	26.10	27.90				
9	20.00	23.60	25.40				
8	17.50	21.10	22.90				
7	15.00	18.60	20.40				
6	12.50	16.10	17.90	15	35.00	38.60	40.40
5	10.00	13.60	15.40	14	32.50	36.10	37.90
4	7.50	11.10	12.90	13	30.00	33.60	35.40
3	5.00	8.60	10.40	12	27.50	31.10	32.90
2	2.50	6.10	7.90	11	25.00	28.60	30.40
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.10	Changed from SCT2509FH-xxP to SCT2509FH-xxCWT115			X.X	±0.35			UNIT	mm		
AO	2009.10.15	NEW			X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15		2021.07.10	SHEET	1/1		
					Angle	± 3'			PROJ.	⊕	PART NO.	SCT2509FH-xxCWT115
					DIM	TOL		2021.07.10			TITLE:	SMH 2.50mm Pitch Female Housing Connector