


RoHS

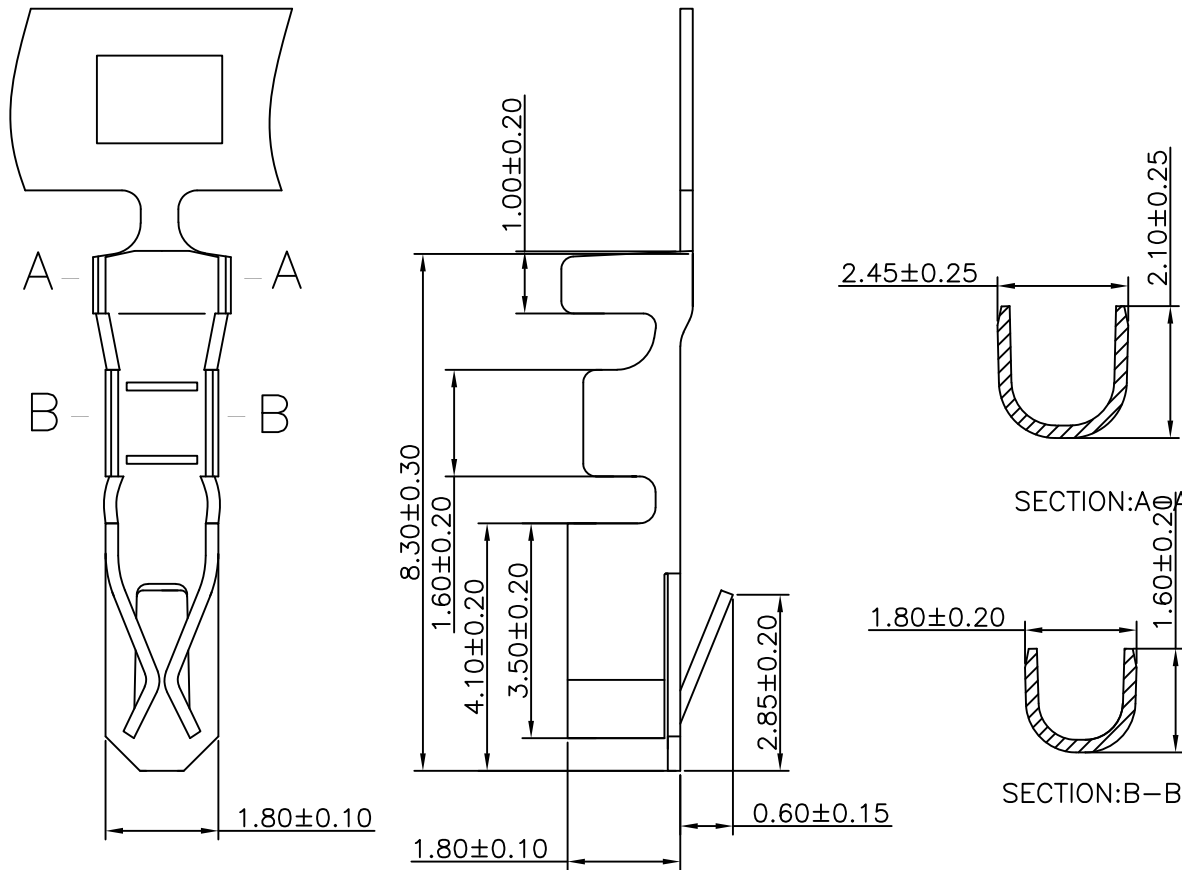

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 800MΩ(Min)
- Withstanding Voltage: 500VAC(Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Wire Range: 22AWG~28AWG(OD:1.8mm)
- Material: Brass, T=0.20mm
- Finish: Tin Plated
- Q'TY: 10,000Pcs/Reel

Ordering Information

SCT2509FT B S 115

Material:
B=Brass

Contact Plated
S=Tin Plated

东莞市晟凯达电子科技有限公司
工程专用章

受控

						OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED
						X.X	±0.35			UNIT	mm	
						X.XX	±0.25			SIZE	A4	
						X.XXX	±0.15			SHEET	1/1	
A1	2021.07.10	Changed from SCT2509FT to SCT2509FTBS115				Angle	± 3'			PART NO.	SCT2509FTBS115	
AO	2015.03.03	NEW				DIM	TOL	APPROVE	Allen	2021.07.10	PROJ.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE						TITLE:		