

RoHS

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: White





Ordering Information

SCT2511H - xx B WT 106


No.of Pins
See Table

Insulation
B=PA66

Color
WT=White

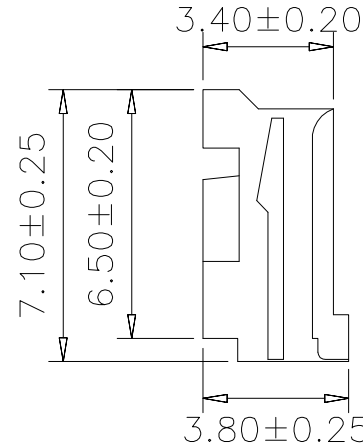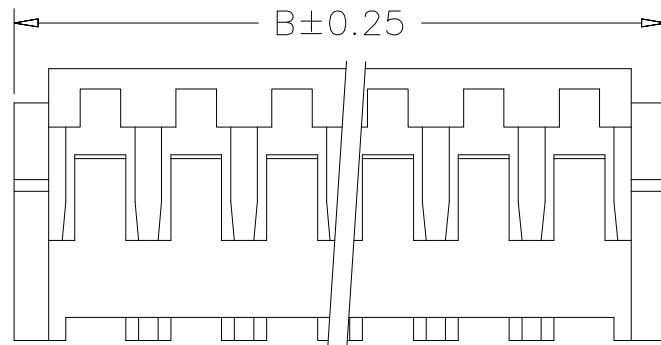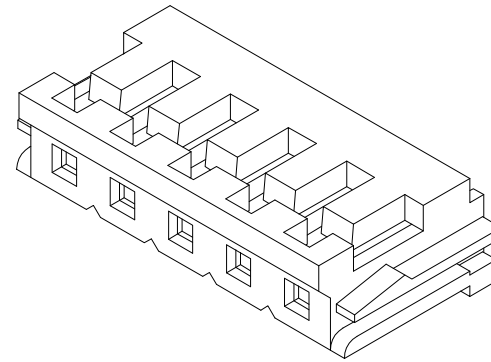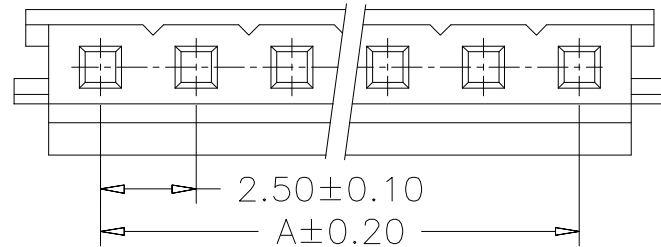

10	22.50	27.00			
9	20.00	24.50			
8	17.50	22.00			
7	15.00	19.50			
6	12.50	17.00	15	35.00	39.50
5	10.00	14.50	14	32.50	37.00
4	7.50	12.00	13	30.00	34.50
3	5.00	9.50	12	27.50	32.00
2	2.50	7.00	11	25.00	29.50
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.07	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.07	Changed from SCT2511H-xxP to SCT2511H-xxBWT106			X.X	±0.35			UNIT	mm		
AO	2009.10.15	NEW			X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15		2021.07.07	SHEET	1/1		
					Angle	± 3'			PROJ.	☉	PART NO.	SCT2511H-xxBWT106
					DIM	TOL		2021.07.07			TITLE:	EH 2.50mm Pitch Housing Connector