

RoHS

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

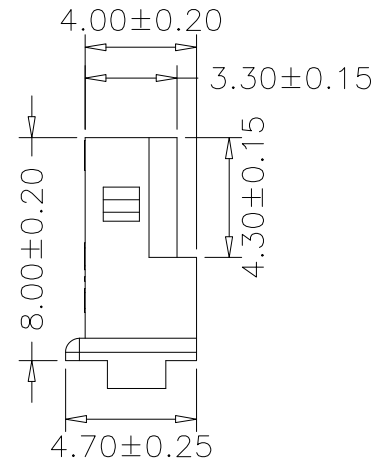
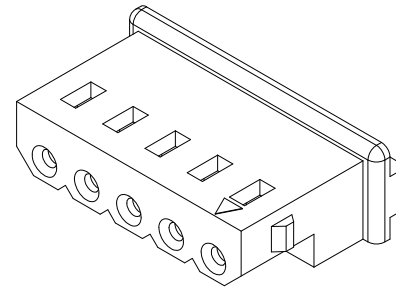
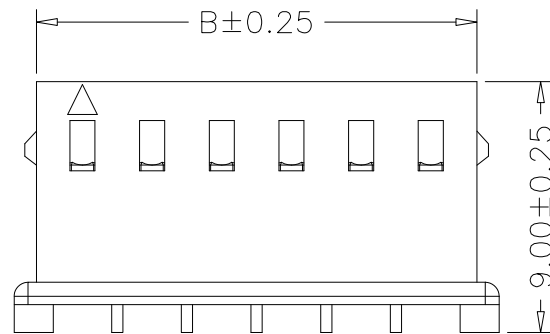
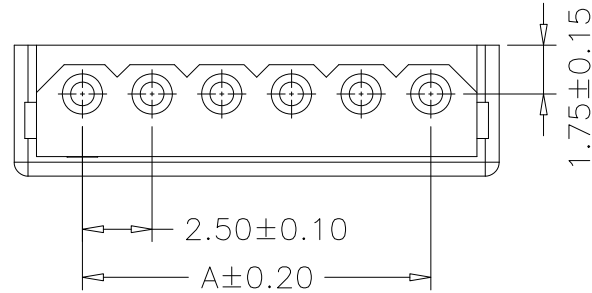
Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: Beige



Ordering Information

SCT2513H - xx B BE 119

No.of Pins See Table
Insulation B=PA66
Color BE=Beige



10	22.50	25.80			
9	20.00	23.30			
8	17.50	20.80			
7	15.00	18.30	16	37.50	40.80
6	12.50	15.80	15	35.00	38.30
5	10.00	13.30	14	32.50	35.80
4	7.50	10.80	13	30.00	33.30
3	5.00	8.30	12	27.50	30.80
2	2.50	5.80	11	25.00	28.30
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.09	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.09	Changed from SCT2513H-xxP to SCT2513H-xxBBE119			X.X	±0.35			UNIT	mm		
AO	2009.10.15	NEW			X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
					Angle	± 3'			PART NO.	SCT2513H-xxBBE119		
					DIM	TOL	APPROVE	Allen	2021.07.09	PROJ.	TITLE:	MX 2.50mm Pitch Housing Connector