

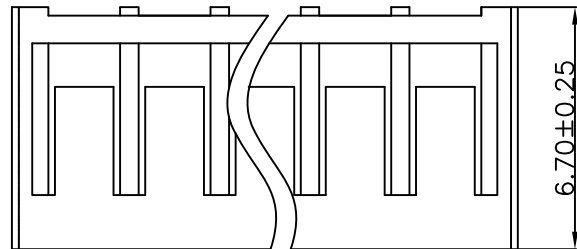
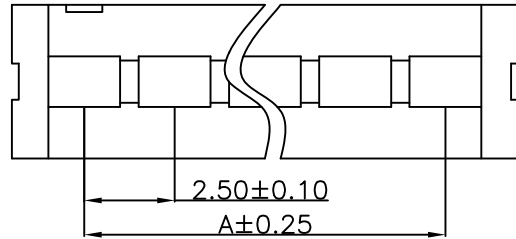


RoHS

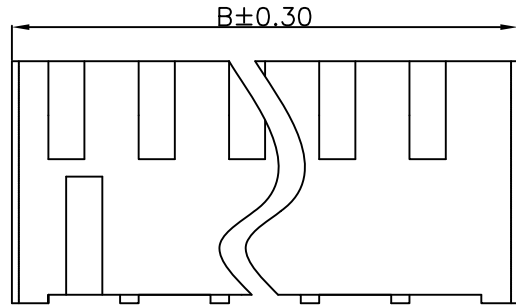

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40°C to +105°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0/2)
- Color: White
- Q'TY: 1000Pcs/Tape&Reel

Ordering Information



SCT2517HR - ** * WT 126

No.of Pins
See Table

Insulation
B=PA66 V0
C=PA66 V2

Color
WT=White

| | | | | | |
|-------|------------|-------|-------|------------|-------|
| 10 | 22.50 | 26.60 | 19 | 45.00 | 49.10 |
| 9 | 20.00 | 24.10 | 18 | 42.50 | 46.60 |
| 8 | 17.50 | 21.60 | 17 | 40.00 | 44.10 |
| 7 | 15.00 | 19.10 | 16 | 37.50 | 41.60 |
| 6 | 12.50 | 16.60 | 15 | 35.00 | 39.10 |
| 5 | 10.00 | 14.10 | 14 | 32.50 | 36.60 |
| 4 | 7.50 | 11.60 | 13 | 30.00 | 34.10 |
| 3 | 5.00 | 9.10 | 12 | 27.50 | 31.60 |
| 2 | 2.50 | 6.60 | 11 | 25.00 | 29.10 |
| Poles | A | B | Poles | A | B |
| | Dimensions | | | Dimensions | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | DRAW | Peng | 2021.07.07 | SCALE | - |  SCONDAR ELECTRONIC LIMITED | | |
|-----|------------|--|--------|---------|-----------|-------|-------|------------|---------|-----|---|--------------------|---|
| A1 | 2021.07.07 | Changed from SCT2517HR-xxP to SCT2517HR-xxxWT126 | --- | --- | X.X | ±0.35 | --- | --- | UNIT | mm | | | |
| AO | 2009.10.15 | NEW | --- | --- | X.XX | ±0.25 | Lisa | 2021.07.07 | SIZE | A4 | | | |
| | | | | | X.XXX | ±0.15 | Allen | 2021.07.07 | SHEET | 1/1 | | | |
| | | | | | Angle | ± 3' | | | PROJECT | ⊕ | PART NO. | SCT2517HR-xxxWT126 |  |
| | | | | | DIM | TOL | | | TITLE: | | SCN 2.50mm Pitch 90° Housing Connector | | |