

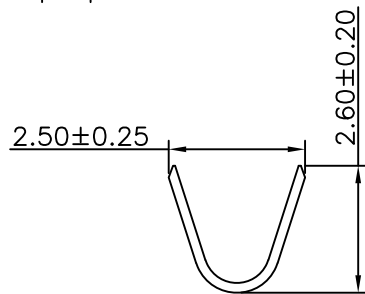
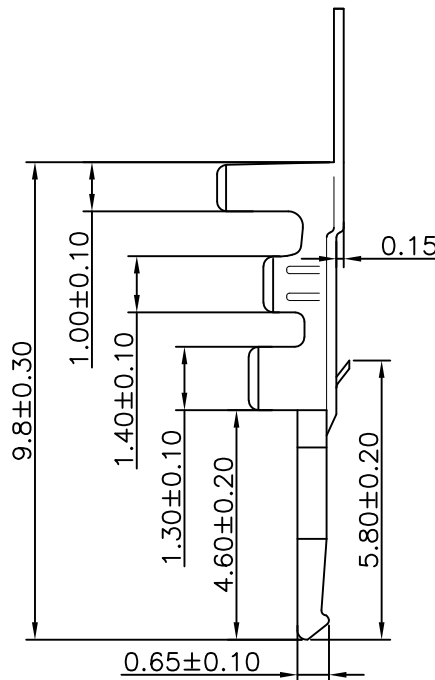


RoHS

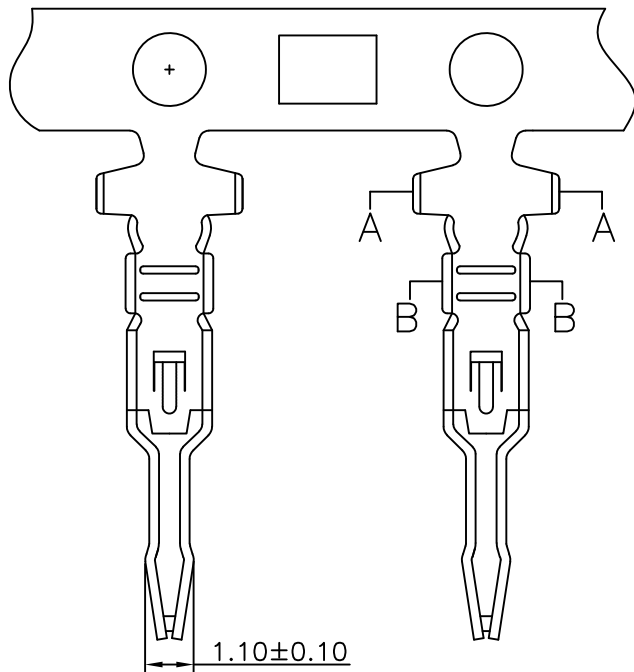

SECTION:A-A



SECTION:B-B

Specification:

- Current Rating: 2.5A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 800VAC(Min)
- Operation Temperature: -25°C to +85°C

Material:




- Wire Range: 22AWG~28AWG
- Material: Phosphor Bronze, T=0.20mm
- Finish: Tin Plated
- Q'TY: 10,000Pcs/Reel

Ordering Information

SCT2517TV P S 109

Material:
P=Phosphor Bronze

Contact Plated
S=Tin Plated

					OPERATION	DRAW	Peng	2021.07.07	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
					X.X ±0.35	DESIGN			UNIT	mm			
					X.XX ±0.25		CHECK	Lisa	2021.07.07	SIZE		A4	
A1	2021.07.07	Changed from SCT2517TVP to SCT2517TVPS109			X.XXX ±0.15	APPROVE	Allen	2021.07.07	SHEET	1/1	PART NO.	SCT2517TVPS109	
AO	2015.03.03	NEW			Angle ± 3'				PROJ.		TITLE:	SCN 2.5mm 180° Terminal	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL							